

# Heat Pump Catalogue

Quietly Superior Heat Pumps




Superior Performance Made for New Zealand Conditions

# Invest in the Best



Mitsubishi Electric is a market leader in energy efficient home comfort solutions. Our commitment to rigorous factory testing and continuous investment in R&D ensures our heat pumps have become more durable, less costly to operate, quieter and easier to install and maintain.

For New Zealand specifically, it has led to industry-leading products being introduced that perform exceptionally well in our harsh and varied climate throughout the seasons. No wonder so many New Zealanders trust and rely on Mitsubishi Electric engineering to keep them warm when it matters most.



## Quality you can rely on:

- All units line tested
- Performance tested
- 800 hour heat stress test
- 2000 hour endurance test

## Superior Heat Pump Technology – Designed in Japan for New Zealand Conditions

Since releasing our first wall mounted split system room heat pump featuring a line flow fan in 1968, Mitsubishi Electric is an established world leader in heat pump technology ever since.

Staying at the forefront of technology is of utmost importance to Mitsubishi Electric. Our commitment to rigorous factory testing and continuous investment in R&D ensures products are of the highest quality and feature superior technology.

## Designed for Heating

While most heat pumps are designed to cool, ours start with heating in mind. Mitsubishi Electric Heat Pumps will keep you cool in the summer, but with a focus on heating, they excel at what New Zealanders expect them to do; keep you warm throughout the winter.

## Buying Quality Saves Money in the Long Run

While buying a budget friendly product may seem cost-effective upfront, those items often end up wearing out or breaking long before their time.

Investing in a higher quality product however, is likely to last and save you money in the long run.

As a heat pump is likely to be used often, it makes sense to purchase a quality brand. This will give you the peace of mind that over time, it will not require as much maintenance or earlier than anticipated replacement.

## Helping Create Warmer, Drier and Healthier Homes

Extensive research has shown a link between cold, damp and mouldy homes and negative health outcomes, particularly for illnesses such as asthma and cardiovascular conditions.

A heat pump is one of the most energy efficient appliances to combat this. Furthermore, specific models in our range feature some of the most advanced filtration systems available, making them ideal for those suffering from asthma or allergies.

## Nationwide Trained Specialist Installation Network

Mitsubishi Electric Heat Pumps are installed through an extensive network of trained specialist dealers. This ensures you are supported with a superior level of product and installation quality.

## Comprehensive 5 Year Warranty

Peace of mind is assured with your choice of Mitsubishi Electric Heat Pumps – supported by a comprehensive 5 year parts and labour warranty.





**The Mitsubishi Electric Advantage ..... 2**

Since releasing our first wall mounted split system room heat pump featuring a line flow fan in 1968, Mitsubishi Electric has been a world leader in heat pump technology ever since. Our commitment to rigorous factory testing and continuous investment in R&D ensures products are of the highest quality and feature superior technology.

**New Zealand's Quietest Heat Pumps ..... 3**

**HyperCore Guaranteed Heating ..... 4–5**

**Wi-Fi Control – Now Voice Control Compatible ..... 6–7**



**Standard GS Series ..... 8–9**  
High Wall System



**EcoCore AP Series ..... 10–13**  
High Wall System



**Large Capacity AS90 ..... 14–15**  
High Wall System



**EcoCore Designer EF Series ..... 16–17**  
High Wall System



**Black Diamond LN Series ..... 18–21**  
High Wall System



**RapidHeat KW Series ..... 22–23**  
Floor Console System



**MLZ Series ..... 24–25**  
Ceiling Cassette System



**SLZ Series ..... 26–27**  
Ceiling Cassette System

**Whole Home Solutions ..... 28–31**

If you're wanting total home comfort to heat or cool multiple rooms, then these heat pump systems will cater to your needs. Options range from OmniCore Multi Room Systems (one outdoor heat pump running multiple indoor units) to discreet Ducted Systems.

**Plasma Quad Connect ..... 32–33**

**Lossnay Fresh Air Heat Recovery Ventilation ..... 34–35**

**Controllers ..... 36–37**

**Specifications ..... 38–44**

**Heat Pump Selection Guide ..... 45**

# The Mitsubishi Electric Advantage



## Our Commitment to Sustainability and Energy Efficiency

---

Since 1988, under its environmental Vision 2050 framework, Mitsubishi Electric strives for the best and the most environmentally friendly use of energy in buildings by developing zero or low-carbon technologies that consume the least amount of energy with minimal environmental impact.

## More Environmentally Friendly R32 Refrigerant

---

Next-generation R32 refrigerant has a global warming potential that is 30% lower compared to older refrigerants such as R410A. Furthermore, zero ozone depleting R32 is easier to reuse and recycle.

## Energy Efficient EcoCore Inverter Technology

---

Superior energy efficiency is achieved by incorporating a large, high density heat exchanger, an advanced high efficiency fan motor and a next-generation inverter compressor that uses more efficient R32 refrigerant.

## Dual Barrier Coating Maximises Efficient Operation

---

Patented Dual Barrier Coating prevents dust and dirt from accumulating on key internal components like the heat exchanger, the fan and the internal duct. Not only does dust and dirt build up typically create unpleasant odours, but it also forces a heat pump to work harder, which can result in significantly impaired energy efficiency.

## Energy Saving i-See Sensor

---

This intelligent sensor continuously takes a thermal scan of the room and splits it into 752 three-dimensional zones, measuring the temperature in each zone to detect exactly where people are in a room and direct heating or cooling only where it is needed, maximising energy efficiency.

## Better Health and Wellbeing with Advanced Air Filtration

---

We spend up to 80% of our time inside and as such, good indoor air quality is paramount to our well-being. This is why Mitsubishi Electric has developed advanced air filtration technology to help provide homeowners with cleaner, healthier air all year round. Available built-in as standard or as an optional extra, advanced air filtration is available in most models across the range.

## Low Standby Power

---

Most models across our range feature our cutting-edge power reduction technology and has seen the standby power reduce to only 1W. This is a reduction of around 80% on the allowable 5W standby power maximum.

## Be Smart and Energy Efficient with Wi-Fi Control

---

Mitsubishi Electric Wi-Fi Control offers more than being able to simply pre-heat or pre-cool rooms before you arrive home.


Forgot to turn off your heat pump? Heat pumps mistakenly left running can quickly be identified at a glance and simply turned off no matter where you are, saving you from nasty surprises on your power bill!

# New Zealand's Quietest Heat Pumps

Mitsubishi Electric consistently produces heat pumps which are not only feature-rich and efficient, but also very, very quiet. We recognise that noise affects comfort, so we constantly work to ensure our heat pumps are as quiet as possible. Starting from just 18dBA\*, our high wall and floor console indoor units are unrivalled for quietness – because we want you to feel the warmth, not hear it!

## Quietness on All Fan Speeds

Some manufacturers are happy for their heat pumps to operate quietly only on their lowest fan setting. Our heat pumps are designed to work differently, giving you quietly superior comfort on all fan speeds.

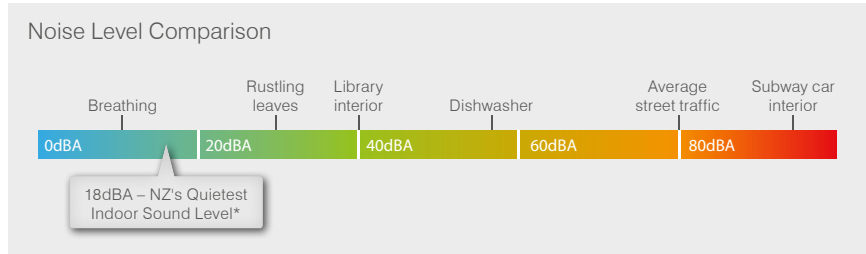

## How are Mitsubishi Electric Heat Pumps Quieter?

Our quest for quietness begins at factory level. Our heat pumps are subjected to rigorous testing at our confidential sound testing facility, with sound ratings then independently certified.

## The Secret to Quietness

### Fan Design

Our larger fan diameter enables the motor to run at a slower speed while maintaining the same air volume. Smaller fans have to spin faster to move more air, creating more noise as air passes over the fan tips.

### Coil Design


The larger surface area of our coils enables the indoor unit to maintain a higher temperature. As a result, less air needs to be passed across the coil to achieve the same indoor temperature; less air means less noise.

### Airflow

Our larger air inlet duct allows air to flow freely, reducing noise as it leaves the heat pump. Think of whistling; it is pretty hard to whistle when your mouth is open wide – the same principle applies here.

### Indoor Unit

Our indoor unit casing has been designed to be robust, ensuring minimal noise is created when operating, i.e. no rattling or shaking.

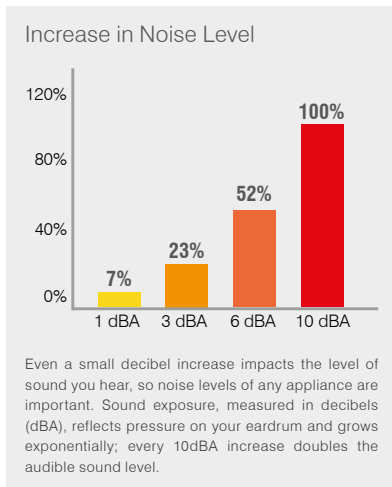

\* MSZ-AP25 and MFZ-KW25/35/42 indoor sound level on lowest fan speed in Heating Mode.

# Guaranteed Heating, Even on the Coldest Days


Did you know ordinary heat pumps start to produce less heat below 7°C? The reduction in heat output is especially noticeable when temperature drops below zero. This is because at these low temperature conditions ordinary heat pumps can really struggle to cope.



## Guaranteed Full Rated Heating Capacity

Mitsubishi Electric HyperCore Technology is specifically designed to ensure its full rated capacity is produced, on all those cold frosty days. In fact, we guarantee this right down to -15°C! It's our promise that no matter where you live, if you experience frosty winter days, it will give you peace of mind that you will get all the heat you paid for whilst feeling the warmth when it matters most.

**"HyperCore heat pumps guarantee full rated heating capacity right down to -15°C."**

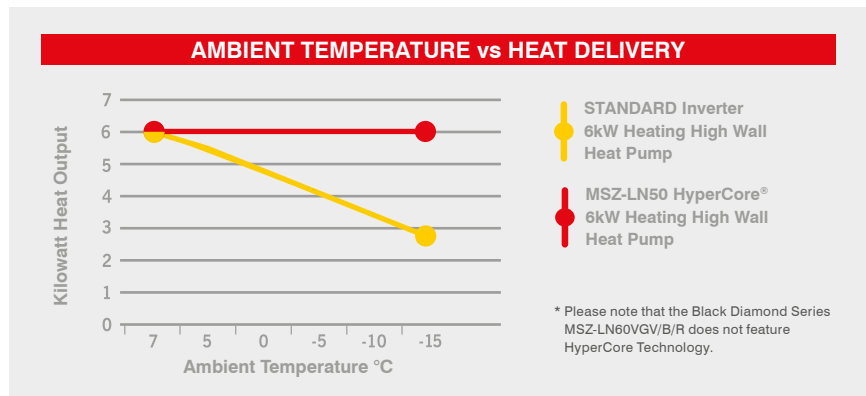

As the graph (above) shows, even though both heat pumps are rated to provide 6kW of heat, their performance differs greatly as the temperature drops. While the standard heat pump produces less heat, the HyperCore LN50 model continues to deliver the full 6kW you paid for. The result? Your room heats up fast and stays warm when you need it most.



## Advanced Defrost Logic


When temperatures drop below zero degrees, ice will build up on the outdoor unit of any heat pump. How the heat pump reacts to this determines how effective it will be in providing heat to your home. To remove the ice build-up the heat pump will need to go into Defrost Mode. During this time the heat pump will not be delivering heat into your home. HyperCore's Defrost Logic has been fine-tuned to extend the period in-between defrost periods and optimise its heating performance.



# THIS IS HYPERCORE<sup>®</sup> COUNTRY

This map shows just how many ground frost days there are right across the country on average during the year. In these low temperature conditions, the performance of a normal heat pump deteriorates. HyperCore Technology however, continues to provide the maximum level of energy efficient heating output.

The result? Your room heats up fast and stays warm when you need it most.

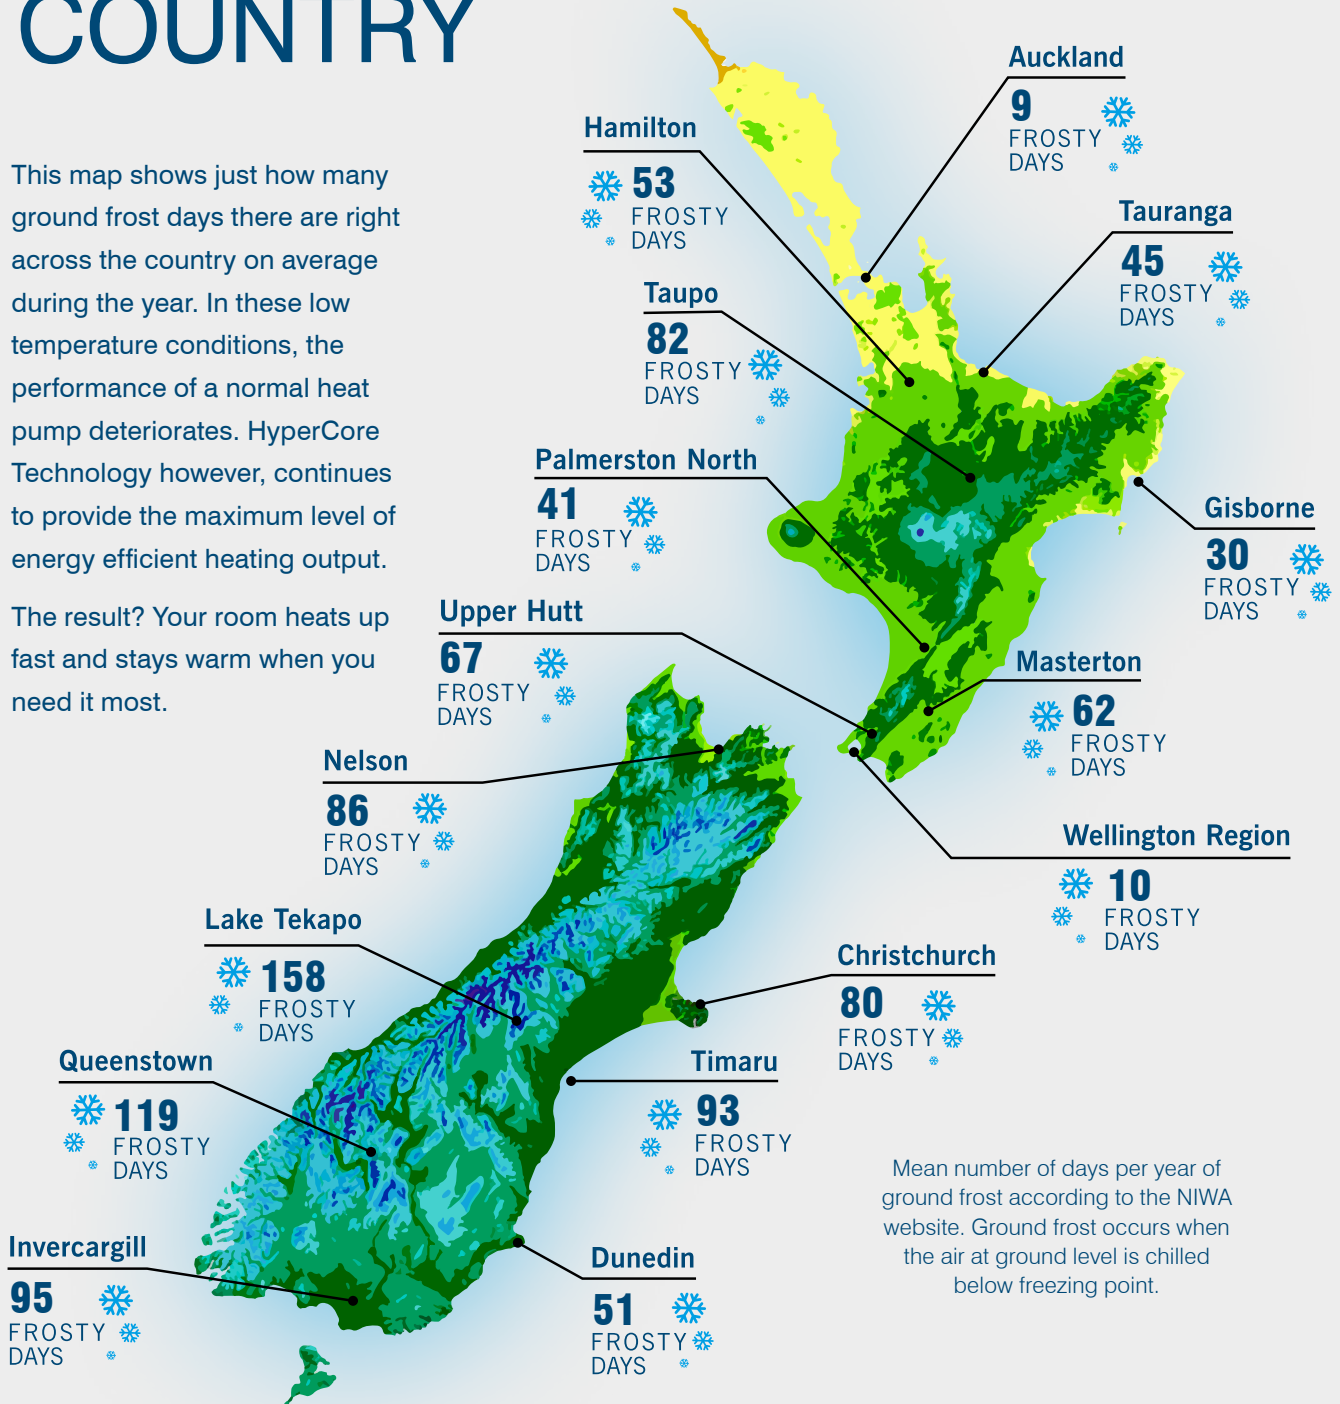

Mean number of days per year of ground frost according to the NIWA website. Ground frost occurs when the air at ground level is chilled below freezing point.



## HyperCore Heat Pump Models

Our Black Diamond LN High Wall Heat Pump 2.5kW – 5.0kW models come standard with HyperCore Technology. Our RapidHeat KW Floor Console Range includes a 5.0kW and a 6.1kW model with optional HyperCore Technology.

# Mitsubishi Electric Wi-Fi Control

Wi-Fi Control gives you the freedom to manage your heat pump(s) through your smart phone, tablet or online account, no matter where you are. On the way home, running late, coming home early, or even when you're in a different country, Wi-Fi Control offers innovative real time management to suit your lifestyle. Now you'll always arrive home to total comfort regardless of what New Zealand's unpredictable weather is doing outside!



## Not Just for When You're Away

Mitsubishi Electric Wi-Fi Control offers more than being able to simply pre-heat or pre-cool rooms before you arrive home. Wi-Fi Control opens up a new world of truly personalised comfort. Effectively replacing your traditional heat pump remote, Wi-Fi Control gives you the freedom to manage your home environment regardless of where you are.

### A Perfect Night's Sleep

Now you can continue to monitor and control your heat pump from the comfort of your couch. Off to the bedroom in half an hour but not sure how cold it is? Wi-Fi Control tells you the actual bedroom temperature so you can pre-heat or pre-cool your bedroom remotely for a perfect night's sleep.



### Be Smart, Be Efficient

Forgot to turn off your heat pump? Heat pumps mistakenly left running can be quickly identified at a glance and simply turned off, no matter where you are.

### A Warm Wake-Up on Frosty Mornings

Wi-Fi Control is also great for pre-heating your living room before you have to get up in the morning. It will make those early frosty morning starts just that little bit easier to face.



### Intelligent Central Control

Mitsubishi Electric Wi-Fi Control is not limited to only managing one heat pump at a time. It truly is an intelligent multitasker. With the purchase of additional interfaces, multiple indoor units can now be seamlessly monitored and controlled. Simple yet effective centralised control at your fingertips.

### Multiple Locations, One App

Mitsubishi Electric Wi-Fi Control gives you the ability to control the heating and cooling needs of multiple units not just in the same home or building, but across a number of different locations. Your home, a holiday home and the office – it can all be controlled and customised through one app. Furthermore, you can now Group Control multiple units all at once for consistent comfort.



**Wi-Fi**  
CONTROL



## Advanced Temperature Management with Rule Setting

Because Wi-Fi Control reflects the real-time room temperature at any time, the unique rule setting functionality allows you to customise a minimum and maximum temperature range. The result – the perfect temperature is maintained for total comfort all night long.

## Set Room Temperature Limits

Wi-Fi Control is ideal for families with children. Imagine no longer needing to physically walk down to each individual bedroom to check the temperature and turn a heat pump on or off using the handheld remotes, potentially interrupting the sleep of children. Simply apply a min./max. temperature rule and let Wi-Fi Control do the rest.

## Optimised Energy Saving with Ducted Systems

When connected to a compatible Mitsubishi Electric Ducted System complete with optional Mitsubishi Electric Zone Control, Wi-Fi Control unlocks expanded functionality and interaction to deliver the very best in advanced energy optimisation. Now you can control and monitor which areas/zones your ducted heat pump is controlling in real time from absolutely anywhere. Meanwhile, overall energy savings can be optimised at the touch of a button to ensure heat energy is directed only to where it is needed most.



You can edit an existing rule or create a new one.



Zone Control integration for Ducted Systems.

## Now Voice Control Compatible\*



Whether as an optional upgrade or built-in, Mitsubishi Electric Wi-Fi Control is now Amazon Alexa and Google Home enabled.

Take your comfort to the next level and enjoy hands-free heat pump control.

Cooking dinner or playing with the kids? Now you can control your heat pump without the need to lift a finger, allowing you to focus on the more important things.



\* For voice control you will need a Smart Speaker/Display/Assistant compatible with Amazon Alexa or Google Home.

# Standard GS Series



The Standard GS Heat Pump Series offers real value while delivering energy efficient heating and cooling. Superior heat pump technology, designed in Japan for New Zealand conditions.



## Classic Design Meets Superior Quality and Efficiency

The Standard GS Series Heat Pump offers real value while delivering exceptional product quality, reliability and energy efficient heating and cooling.

Combining a classic neutral design with superior energy saving features, the GS Series is the perfect heat pump for where it matters most – in living rooms and bedrooms.

### Home Comfort Your Way - Optional Upgrades for Every Lifestyle

With a host of optional upgrades, from Wi-Fi Control to Plasma Quad Connect high-performance air filtration, the Standard GS Series can adapt to fit your lifestyle.

## Next-Generation R32 Technology


Superior energy efficiency is achieved by incorporating a large, high-density heat exchanger, an advanced high-efficiency fan motor and a next-generation compressor using the latest super efficient and more environmentally friendly R32 refrigerant.

## Filtration for Cleaner Air

The standard air purifying filter traps dust, pollen and other airborne contaminants while the optional washable Anti-Allergy Enzyme Filter effectively breaks down harmful microbes such as bacteria, mould and dust mites.



**M**itsubishi  
**E**lectric  
**Q**uality

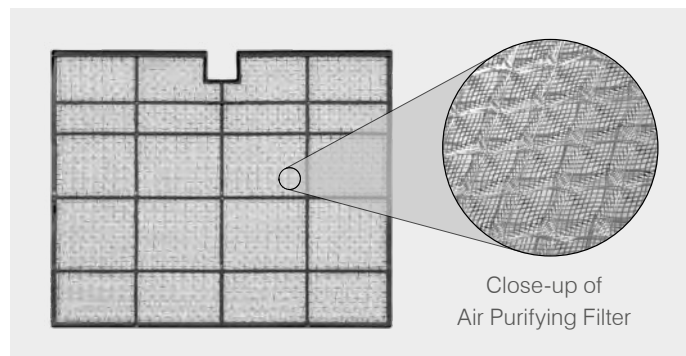

## Econo Cool Function



This intelligent temperature control feature adjusts the airflow distributed in the room depending on the air outlet temperature. Temperature settings can be raised by 2°C without any loss of in-room comfort. That's equal to a gain of up to 20% in energy efficiency.

## Vertical Swing Vane Airflow



The Vertical Swing Vane function enables airflow direction to be adjusted up, down or set to Swing Mode – ensuring every corner of the room is comfortable.

## Blue Fin Coating – Built to Withstand the Elements



The heat exchanger of the outdoor unit has been treated with Blue Fin Anti-Corrosion Treatment, slowing the corrosion process caused by salt and sulphur in the air especially in coastal and high sulphur areas.

## 12 Hour Programmable Controller



With an easy-to-read display and large buttons, the hand-held 12 Hour Programmable Controller is designed to give you simplified control of your Standard GS Series High Wall.

Because the controller removes the complicated and focuses on the operating functions that really matter, whether you are tech savvy or not, you can rest assured comfort will always be at your fingertips.



## Optional Wall Mounted PAR 7-Day Controller



The optional wall mounted controller features a built-in weekly timer, allowing you to program up to four time and temperature settings for each day of the week.

You can now return to comfort without having to manually adjust the temperature. Perfect for anyone with a busy lifestyle, the 7-Day Controller is a great way to regulate your energy usage without compromising on comfort.

## Optional Wi-Fi Control! Never Return to a Cold Home Again



Now you can pre-heat or cool a room no matter where you are. On the way home, running late, or in a different country, with optional Wi-Fi Control\* you'll always arrive home to total comfort.

Wi-Fi Control is Amazon Alexa and Google Home enabled so you can take your comfort to the next level and enjoy hands-free heat pump control. See pages 6–7 for more details on Wi-Fi Control.

## Optional Plasma Quad Connect for Cleaner, Healthier Air



Designed to integrate with your existing Standard GS Series Heat Pump, this high-performance two-stage advanced air filtration module, cleans and minimises dust and other allergens for better indoor air quality, all year round.

See pages 32–33 for more details on Plasma Quad Connect.



Dimensions (WxDxH): 799 x 232 x 290mm

### MSZ-GS25VFD

Heating Capacity: 3.1 kW | Cooling Capacity: 2.5 kW

### MSZ-GS35VFD

Heating Capacity: 3.7 kW | Cooling Capacity: 3.5 kW



Dimensions (WxDxH): 923 x 250 x 305mm

### MSZ-GS50VFD

Heating Capacity: 5.5 kW | Cooling Capacity: 5.0 kW

### MSZ-GS60VFD

Heating Capacity: 6.6 kW | Cooling Capacity: 6.0 kW



Dimensions (WxDxH): 1100 x 238 x 325mm

### MSZ-GS71VFD

Heating Capacity: 8.0 kW | Cooling Capacity: 7.1 kW

### MSZ-GS80VFD

Heating Capacity: 9.0 kW | Cooling Capacity: 7.8 kW



OPTIONAL  
**Wi-Fi**  
CONTROL\*

\* Wi-Fi adapter must be mounted externally.

Optional  
**Plasma Quad Connect**  
Advanced Air Filtration




# EcoCore Series – AP Mini

The AP Mini High Wall Heat Pump brings leading-edge technology and features in New Zealand's smallest<sup>†</sup> high wall indoor unit. The perfect solution for bedrooms or small rooms where space is at a premium. Pint-sized but big on performance, the AP Mini is packed with features that maximise energy efficiency.



## New Zealand's Smallest<sup>†</sup> High Wall Indoor Unit

Specifically designed where space is at a premium, the **250mm high by 760mm wide** footprint makes it ideal for positioning above doorways in bedrooms and home offices. Now smaller spaces no longer need to miss out on year-round comfort.

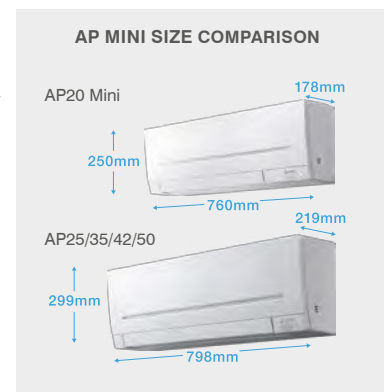

## Small Enough to Fit Above Doorways

With a 16.4%\* size reduction in height and 5% reduction in width when compared to the bigger EcoCore AP 25-50 models, they can even be installed in very tight places that would traditionally not have been possible such as above doorways.

## Energy Efficient EcoCore Inverter Technology

Superior energy efficiency is achieved by incorporating a large, high density heat exchanger, an advanced high efficiency fan motor and a next-generation inverter compressor that uses more efficient R32 refrigerant.

## More Environmentally Friendly R32 Refrigerant

With a global warming potential that is 30% lower compared to older refrigerants such as R410A, next-generation R32 refrigerant has a much lower environmental impact. Furthermore, zero ozone depleting R32 is easier to reuse and recycle.

\*Indoor unit height compared to the MSZ-AP25/35/42/50 range.  
†Indoor unit total volume size of 0.034m<sup>3</sup>.

# Meet the Mighty Mini



**Just 25cm high!**




## Dual Barrier Coating Maximises Efficient Performance



The patented and world's first Dual Barrier Coating from Mitsubishi Electric prevents dust and dirt from accumulating on the inner surface of the indoor unit. By keeping your heat pump clean year-round you can rest assured your heat pump will always perform at its best.

### Comparison of dirt on heat exchanger, fan and air duct.

(Factory simulated in-house comparison.)

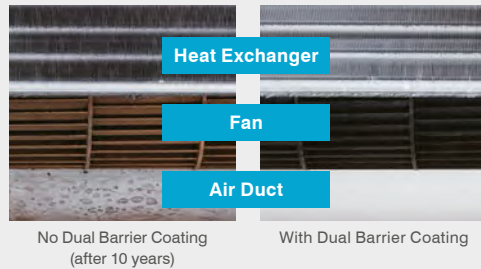

Dimensions (WxDxH): 760 x 178 x 250mm


### MSZ-AP20VGD

Heating Capacity: 2.5 kW | Cooling Capacity: 2.0 kW

## Washable Air Purifying Filter



The AP Mini is equipped with an Air Purifying Filter. This washable filter traps particles such as dust, pollen and other airborne contaminants, generating stable antibacterial and deodorising effects. The size of the

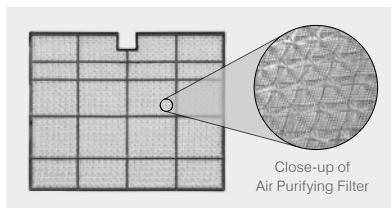

three-dimensional surface has been increased from previous models, enlarging the filter capture area. These features give the Air Purifying Filter better dust collection performance than conventional filters.

## Horizontal Airflow



The AP Mini eliminates uncomfortable draughts with Horizontal Airflow in Cooling Mode, by spreading airflow evenly across the ceiling.

## Blue Fin Coating – Built to Withstand the Elements



The heat exchanger of the outdoor unit has been treated with Blue Fin Anti-Corrosion Treatment, slowing the corrosion process caused by salt and sulphur in the air especially in coastal and high sulphur areas.

## 7-Day Programmable Controller



The AP Mini Heat Pump comes standard with a 7-Day Controller, so you can customise your heating and cooling needs to your lifestyle with as much energy efficiency as possible.

## Optional Wi-Fi Control! Never Return to a Cold Home Again



Now you can pre-heat or cool a room no matter where you are. On the way home, running late, or in a different country, with optional Wi-Fi Control\* you'll always arrive home to total comfort.



\* Wi-Fi adapter must be mounted externally.

## Optional Plasma Quad Connect for Cleaner, Healthier Air



Designed to integrate with your existing AP Mini Heat Pump, this high-performance two-stage advanced air filtration module, cleans and minimises dust and other allergens for better indoor air quality, all year round.



# EcoCore Series – AP Classic and AP Plus



The EcoCore Series AP Classic (with optional Wi-Fi) and AP Plus (with built-in Wi-Fi) High Wall Heat Pumps set a new standard in super energy efficient heating. Next-generation EcoCore Technology is designed to use less power than ever before. And starting at just 18dBA\*, it's NZ's quietest – ideal for living rooms and bedrooms!



## New Zealand's Quietest Heat Pump!\*

Starting at an incredibly quiet 18dBA on its lowest fan speed, the EcoCore Series AP25 indoor unit is New Zealand's quietest high wall heat pump ever. It is ideal where quietness matters most, in bedrooms even on the coldest of winter nights.

Furthermore, the addition of Night Mode means the outdoor operating noise level drops by a further 3dBA – for the perfect night's sleep.



Fan Coil



Heat Exchanger

## The Secret to Quietness

By making the heat exchanger 32% thinner† and designing the fan coil to be 22% larger† in comparison to previous models, pressure loss across the heat exchanger is minimised and air can now be moved across a larger fan surface. Add to this a new aerodynamically designed fan coil, and a new level of quietness has been achieved!

## Dual Barrier Coating Maximises Efficient Performance

The patented and world's first Dual Barrier Coating from Mitsubishi Electric prevents dust and dirt from accumulating on the inner surface of the indoor unit; keeping your heat pump clean year-round.

Keeping key internal components like the heat exchanger, fan and internal duct clean is important for both home comfort and efficiency. Not only does dust and dirt build-up typically create unpleasant odours, it also forces a heat pump to work harder, which can result in significantly impaired energy efficiency.


Dual Barrier Coating prevents dust and oil build-up on the interior of the heat pump for the ultimate in peace of mind, ease and comfort.



Dual Barrier Coating

### Comparison of dirt on heat exchanger, fan and air duct.

(Factory simulated in-house comparison.)

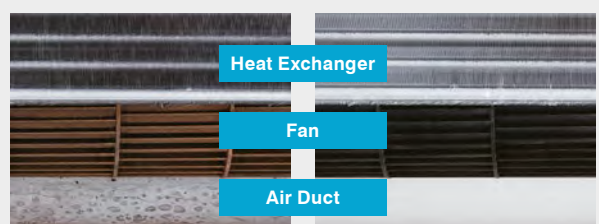

No Dual Barrier Coating (after 10 years)

With Dual Barrier Coating

\* The EcoCore Series AP25 indoor sound level on lowest fan setting in Heating Mode.

† Compared to MSZ-GL Series.

## Energy Efficient EcoCore Inverter Technology



Superior energy efficiency is achieved by incorporating a large, high density heat exchanger, an advanced high efficiency fan motor and a next-generation inverter compressor that uses more efficient R32 refrigerant.

## More Environmentally Friendly R32 Refrigerant




With a global warming potential that is 30% lower compared to older refrigerants such as R410A, next-generation R32 refrigerant has a much lower environmental impact. Furthermore, zero ozone depleting R32 is easier to reuse and recycle.

## Washable Air Purifying Filter



The EcoCore AP Series is equipped with an Air Purifying Filter. This washable filter traps particles such as dust, pollen and other airborne contaminants, generating stable antibacterial and deodorising effects. The size of the

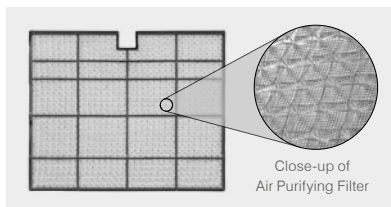

three-dimensional surface has been increased from previous models, enlarging the filter capture area. These features give the Air Purifying Filter better dust collection performance than conventional filters.

## Horizontal Airflow



The EcoCore AP Series eliminates uncomfortable draughts with Horizontal Airflow in Cooling Mode, by first spreading airflow evenly across the ceiling.

## Wide and Long Airflow\*



The Wide Airflow Mode enables the airflow direction to be adjusted from left to right and is ideal for open plan environments – ensuring every corner of the room is comfortable. The Long Airflow Mode extends airflow distance.

## Blue Fin Coating – Built to Withstand the Elements



The heat exchanger of the outdoor unit has been treated with Blue Fin Anti-Corrosion Treatment, slowing the corrosion process caused by salt and sulphur in the air especially in coastal and high sulphur areas.

## Never Return to a Cold Home Again with Wi-Fi Control



Pre-heat or cool a room no matter where you are. With Wi-Fi Control you'll always arrive home to total comfort. Wi-Fi Control is built-in to the AP Plus Series and available as an optional upgrade with the AP Classic Series.

## Optional Plasma Quad Connect for Cleaner, Healthier Air



Designed to integrate with your existing EcoCore AP Series Heat Pump, this high-performance two-stage advanced air filtration module, cleans and minimises dust and other allergens for better indoor air quality, all year round.

\* AP60/71/80 models only.

## AP Classic | AP Plus



Dimensions (WxDxH): 798 x 219 x 299mm

### MSZ-AP25VG(K)D

Heating Capacity: 3.2 kW | Cooling Capacity: 2.5 kW

### MSZ-AP35VG(K)D

Heating Capacity: 3.7 kW | Cooling Capacity: 3.5 kW

### MSZ-AP42VG(K)D

Heating Capacity: 5.4 kW | Cooling Capacity: 4.2 kW

### MSZ-AP50VG(K)D

Heating Capacity: 6.0 kW | Cooling Capacity: 5.0 kW



Dimensions (WxDxH): 1100 x 257 x 325mm

### MSZ-AP60VG(K)D

Heating Capacity: 6.8 kW | Cooling Capacity: 6.0 kW

### MSZ-AP71VG(K)D

Heating Capacity: 8.0 kW | Cooling Capacity: 7.1 kW

### MSZ-AP80VG(K)D

Heating Capacity: 9.0 kW | Cooling Capacity: 7.8 kW

AP Classic

AP Plus

OPTIONAL  
**Wi-Fi**  
CONTROL

BUILT-IN  
**Wi-Fi**  
CONTROL

Optional  
**Plasma Quad Connect**  
Advanced Air Filtration

# Large Capacity AS90 High Wall



Combining powerful performance in an elegant and compact case, the AS90 offers high airflow, making it ideal for light commercial applications such as schools, halls, and open plan shared spaces.



## The Ideal Solution for Large Spaces

Boasting a capacity of 9.0kW in cooling (10.3kW in heating), this model features next-generation R32 high-efficiency compressor technology, developed and engineered to use less power than ever before. The Wide and Long Airflow Mode, in addition to Powerful Mode, ensures far-reaching coverage making the AS90 ideal for larger, open working spaces.



## Next-Generation R32 Technology

Superior energy efficiency is achieved by incorporating a large, high-density heat exchanger, an advanced high-efficiency fan motor and a next-generation compressor using the latest super efficient and more environmentally friendly R32 refrigerant.



## Powerful Mode

The one-touch Powerful Mode automatically adjusts the fan speed and temperature, guaranteeing full power operation within 15 minutes for faster heating or cooling. After 15 minutes, the unit automatically returns to its previous operation settings.


## Wide and Long Airflow

The Wide Airflow Mode enables airflow direction to be adjusted from left to right, ideal for open plan environments ensuring every corner of the room is comfortable.



The Long Airflow Mode extends airflow by up to 12m to reach even the furthest point of open plan or larger living spaces.

These modes are simply activated at the touch of a button on your remote controller.

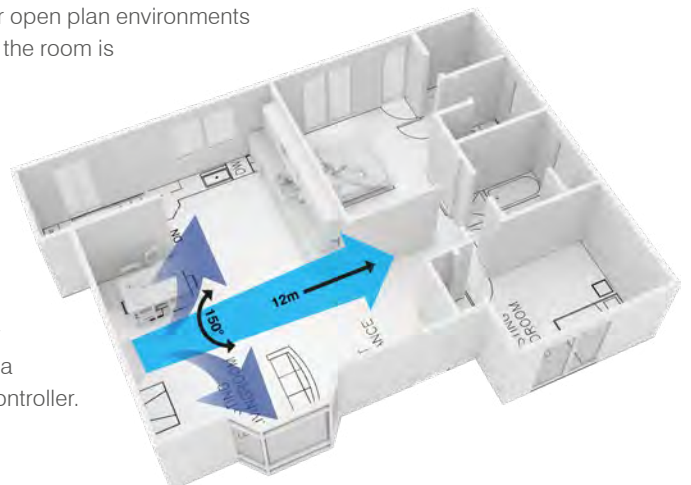



## Two Stage Advanced Filtration



The AS90 High Wall is equipped with a standard air filter and an Anti-Allergy Enzyme Filter. This washable air cleaning filter traps harmful particles such as dust, pollen and other airborne contaminants that can cause allergic reactions. Furthermore, the filter itself is infused with an artificial Enzyme Catalyst that helps break down harmful microbes such as bacteria, mould and dust mites.

## Econo Cool Function



This intelligent temperature control feature adjusts the airflow distributed in the room depending on the air outlet temperature. Temperature settings can be raised by 2°C without any loss of in-room comfort. That's equal to a gain of up to 20% in energy efficiency.

## i-Save Mode



Saves temperature and fan speed combinations, including a set-back temperature of 10°C in Heating Mode when the room is unoccupied. This means that the system will use less energy to reach the desired temperature once the room is reoccupied.

## Blue Fin Coating – Built to Withstand the Elements



The heat exchanger of the outdoor unit has been treated with Blue Fin Anti-Corrosion Treatment, slowing the corrosion process caused by salt and sulphur in the air especially in coastal and high sulphur areas.

## Night Mode



Night Mode will automatically dim the operation indicator light, displaying any beeping from the indoor unit. Furthermore, the outdoor operating noise level is reduced by 3dBA ensuring quiet nights for both you and your neighbours.

## 7-Day Programmable Controller



The Large Capacity AS90 High Wall Heat Pump System features a built-in weekly timer, allowing you to program up to four time and temperature settings for each day of the week. The 7-Day Controller is the perfect way to maximise energy efficiency without compromising on comfort.

## Optional Wi-Fi Control! Never Return to a Cold Home Again



Now you can pre-heat or cool a room no matter where you are. On the way home, running late, or in a different country, with optional Wi-Fi Control† you'll always arrive home to total comfort.

## Optional Plasma Quad Connect for Cleaner, Healthier Air



Designed to integrate with your existing Large Capacity AS90 Heat Pump, this high-performance two-stage advanced air filtration module, cleans and minimises dust and other allergens for better indoor air quality, all year round.



Dimensions (WxDxH): 1170 x 295 x 365mm

**MSZ-AS90VGD**

Heating Capacity: 10.3 kW | Cooling Capacity: 9.0 kW



OPTIONAL  
**Wi-Fi**  
CONTROL†

Optional  
**Plasma Quad Connect**  
Advanced Air Filtration

† Wi-Fi adapter must be mounted externally.

# EcoCore Designer EF Series



The EcoCore Designer EF Series features exceptional energy efficiency and built-in Wi-Fi Control. Elegant and slimline in design, these heat pumps are available in a choice of colours including Rich Black Diamond, Matte Silver or new Pure White – so you can truly reflect your interior design style.



## Why Limit Yourself to One Colour When You Can Choose from Three?

Personalise your home interior with the new EcoCore Designer EF Series High Wall Heat Pump. Available in a Rich Black Diamond, Matte Silver or Pure White finish, now you can mix and match, blend in or stand out – it's up to you!



The Designer EF Series has been developed specifically with both good design and function in mind. The range features advanced filtration, whisper quiet operation and built-in Wi-Fi Control so you'll always come home to perfect comfort. In addition, more environmentally friendly and energy efficient R32 refrigerant helps minimise the impact on the environment.

The slimline Designer EF Series is a true achievement in superior performance and looks. It's an investment in all-round comfort that will never go out of style.

**ECOCORE**<sup>®</sup>



## Energy Efficient EcoCore Inverter Technology

Superior energy efficiency is achieved by incorporating a large, high density heat exchanger, an advanced high efficiency fan motor and a next-generation inverter compressor that uses more efficient R32 refrigerant.

## More Environmentally Friendly R32 Refrigerant

With a global warming potential that is 30% lower compared to older refrigerants such as R410A, next-generation R32 refrigerant has a much lower environmental impact. Furthermore, zero ozone depleting R32 is easier to reuse and recycle.

# Designer Series

## Award-Winning Timeless Design



reddot design award



The Designer EF Series features a distinctive contemporary, slimline profile and has been awarded the prestigious Red Dot Design Award in recognition for outstanding design quality.

The international jury only confers this sought-after seal of quality to products that set themselves apart significantly from comparable products thanks to their excellent design.



Dimensions (WxDxH): 885 x 195 x 299mm

### MSZ-EF25VGKW/B/S

Heating Capacity: 3.2 kW | Cooling Capacity: 2.5 kW

### MSZ-EF35VGKW/B/S

Heating Capacity: 4.0 kW | Cooling Capacity: 3.5 kW

### MSZ-EF42VGKW/B/S

Heating Capacity: 5.4 kW | Cooling Capacity: 4.2 kW

### MSZ-EF50VGKW/B/S

Heating Capacity: 5.8 kW | Cooling Capacity: 5.0 kW

## Advanced Nano Platinum Filter



The extra large, washable 3D filter surface incorporates nanometre-sized platinum ceramic particles designed to effectively collect fine dust particles, deodorise the air and eliminate bacteria at the same time. This level of advanced filtration is better at the collection of dust in comparison to conventional filters.

## Quiet Operation



Designer EF Series indoor units feature Silent Mode – a fan speed setting that provides quiet operation as low as 19dBA\* so you will feel the warmth, not hear it.



## Blue Fin Coating – Built to Withstand the Elements



The heat exchanger of the outdoor unit has been treated with Blue Fin Anti-Corrosion Treatment, slowing the corrosion process caused by salt and sulphur in the air especially in coastal and high sulphur areas.

## 7-Day Programmable Controller



All Designer EF Series High Wall Heat Pumps feature a built-in weekly timer, allowing you to program up to four time and temperature settings for each day of the week. The 7-Day Controller is the perfect way to maximise energy efficiency without compromising on comfort.

## Wi-Fi Control Built-in! Never Return to a Cold Home Again



Now you can pre-heat or cool a room no matter where you are. On the way home, running late, or in a different country, with Wi-Fi Control you'll always arrive home to total comfort.



## Optional Plasma Quad Connect for Cleaner, Healthier Air



Designed to integrate with your existing EcoCore Designer EF Heat Pump, this high-performance two-stage advanced air filtration module, cleans and minimises dust and other allergens for better indoor air quality, all year round.



\* EF25 indoor sound level on lowest fan setting in Cooling Mode.

# Black Diamond LN Series



The Black Diamond LN Series sets the new standard in personalised comfort and style. Available in three reflective colours, the range is packed with advanced features including Plasma Quad Plus Filtration ideal for allergy sufferers, the 3D i-See Sensor for customised heating or cooling and Wi-Fi Control is built-in!



## Reflect Your Design Personality

Featuring a striking flat panel design, the Black Diamond LN Series is available in three unique reflective colour finishes – White Diamond, Red Diamond and Black Diamond, that change depending on the light in the room.

Now you can make a real interior design style statement with your heat pump colour choice.


## HyperCore as Standard\*

The Black Diamond LN Series 2.5–5kW capacities come standard with HyperCore Technology.

While ordinary heat pumps produce less heat below 7°C, Mitsubishi Electric HyperCore Technology guarantees to continue to deliver its full rated heating capacity right down to -15°C, so you stay warm when you need it most.

See page 4 for more details on our HyperCore Technology.

AMBIENT TEMPERATURE vs HEAT DELIVERY

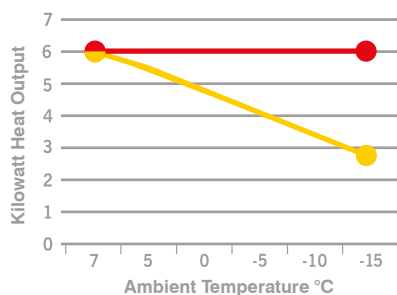


● MSZ-LN50 HyperCore® 6kW Heating High Wall Heat Pump
 ● STANDARD Inverter 6kW Heating High Wall Heat Pump



\* The Black Diamond Series LN60 does not feature HyperCore Technology.

## 3D i-See Sensor

The 3D i-See Sensor detects the presence and position of people in the room using thermal heat recognition, adjusting the temperature and airflow pattern for optimal comfort. This helps the Black Diamond LN Series do more than simply save energy, it also enables a new level of truly personalised comfort to be achieved.

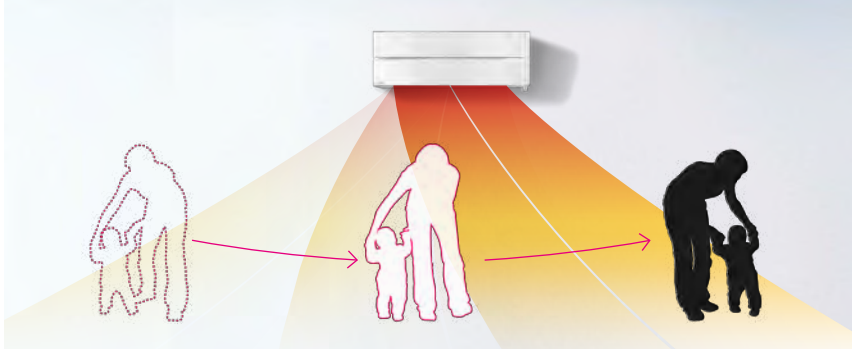

You always feel warm and comfortable as the direct heat follows you as you move around the room.

### Thermal Scan Technology

The 3D i-See Sensor continually takes a thermal scan of the room, dividing it into 752 three-dimensional zones and measuring the temperature in each zone to detect exactly where people are in a room.

## Independently Controlled Dual Split Vane Airflow

### Intuitively Adjusts the Airflow Direction to Where it's Needed

The 3D i-See Sensor works in conjunction with the Dual Split Vanes to provide heating or cooling to where it is needed most. As a result, it can save energy by not heating or cooling areas that don't require it. Whether you prefer direct, indirect or evenly distributed airflow, the 3D i-See Sensor and Dual Split Vanes provide the ultimate in customisable airflow.

### You'll Never Feel Cold

The 3D i-See Sensor can recognise movement of an individual in a room and subsequently direct the airflow with the Dual Split Vanes; so they continue feeling warm no matter where they have moved to in the room.

### Comfort for All With Multiple Airflow Directions

The 3D i-See Sensor can identify multiple people present in the room and adjust the Dual Split Vanes to direct heating or cooling evenly throughout; so everybody feels comfortable in the room.



Only one occupant feels direct heat.





With Split Vane both occupants feel direct heat.

### Even Airflow – Airflow Only Where You Need It

With Even Airflow Mode, the 3D i-See Sensor memorises people's movements and furniture positions, efficiently distributing airflow only to where it is needed.




8 sensors measure while moving left to right

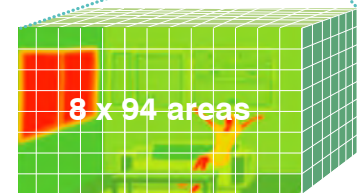


752 three-dimensional zones

# Black Diamond LN Series

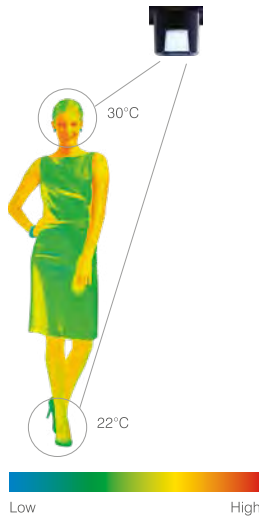


## Energy Saving No Occupancy Modes


The 3D i-See Sensor detects whether or not there are people in the room, and automatically switches to one of the No Occupancy Modes, as set by the user.



The 3D i-See Sensor continuously scans the room for occupants.



In Energy Saving Mode – power is reduced when you leave the room.





In Auto-Off Mode – unit switches off when you leave the room.

In No Occupancy Energy Saving Mode when no one is in the room, the unit automatically reduces power consumption by approximately 10% after 10 minutes, and 20% after 60 minutes. In No Occupancy Auto-Off Mode, when no one is in the room, the unit turns off automatically.

## Advanced Plasma Quad Plus Filtration

The advanced Plasma Quad Plus Filtration System, featuring high-performance two stage plasma technology, filters the air to clean away viruses such as Covid-19\* as well as smells, dust, moulds and other common household allergens.

The Two Stage Plasma Quad Plus Filter works like an electrical curtain, using an electrical discharge to catch and neutralise even microscopically small particles in the air. In fact, it can even capture PM2.5 particles (that's 20 times smaller than the width of a human hair!).

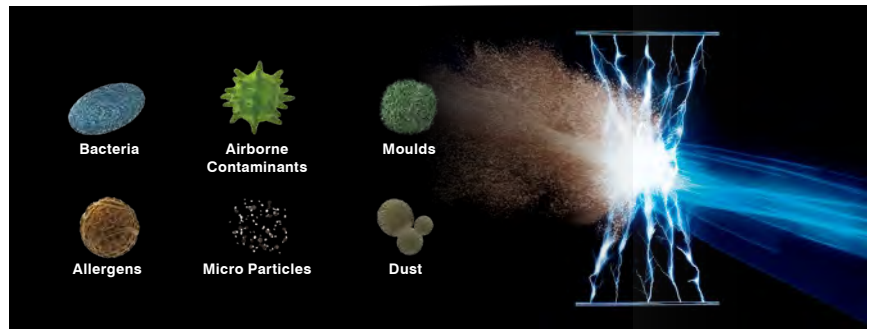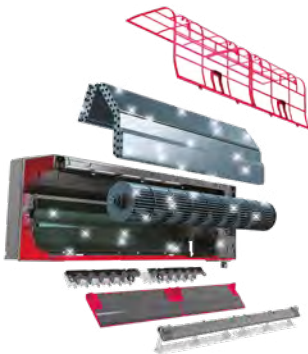

Independent test results confirm that the Plasma Quad Filtration System achieves extremely high reduction results in the removal of allergen, mould, bacteria and airborne contaminants in the room. Providing up to 98.8% effectiveness of removing airborne Covid-19\* particles too, it's the ultimate peace of mind for ensuring a healthier, cleaner living environment.



## Superior Energy Efficiency

Black Diamond LN Series Heat Pumps are some of the most energy efficient heat pumps available in New Zealand.

This high energy efficiency is achieved by incorporating a large, high-density heat exchanger, an advanced high-efficiency fan motor and a next-generation compressor using the latest in super efficient R32 refrigerant.

\* PQC Electrode Collection Plate, Test Chamber Lab – Test No. 20KB070569, Microbial Testing Laboratory Kobe Testing Center Japan Textile Products Quality and Technology Center.

^ Such as Influenza A virus A/Aichi/2/68 (H3N2) - tested in a 25m<sup>2</sup> room by Virus Research Center, Sendai Medical Center, National Hospital Organisation according to JEM 1467.

## Dual Barrier Coating Maximises Efficient Performance



The patented and world's first Dual Barrier Coating from Mitsubishi Electric prevents dust and dirt from accumulating on the inner surface of the indoor unit; keeping your heat pump clean year-round.

Keeping key internal components like the heat exchanger, fan and internal duct clean is important for both home comfort and efficiency. Not only does dust and dirt build-up typically create unpleasant odours, it also forces a heat pump to work harder, which can result in significantly impaired energy efficiency.

Dual Barrier Coating prevents dust and oil build-up on the interior of the heat pump for the ultimate in peace of mind, ease and comfort.

## More Environmentally Friendly R32 Refrigerant



With a global warming potential that is 30% lower compared to older refrigerants such as R410A, next-generation R32 refrigerant has a much lower environmental impact. Furthermore, zero ozone depleting R32 is easier to reuse and recycle.

## Blue Fin Coating – Built to Withstand the Elements



The heat exchanger of the outdoor unit has been treated with Blue Fin Anti-Corrosion Treatment, slowing the corrosion process caused by salt and sulphur in the air especially in coastal and high sulphur areas.

## Quiet Operation



Black Diamond LN indoor units feature Silent Mode – a fan speed setting that provides quiet operation as low as 19dBA\* so you will feel the warmth, not hear it.

## 7-Day Programmable Controller



All Black Diamond LN Series Heat Pumps feature a built-in weekly timer, allowing you to program up to four time and temperature settings for each day of the week. You can now return to comfort without having to manually adjust the temperature. Perfect for anyone with a busy lifestyle, the 7-Day Controller is a great way to regulate your energy usage without compromising on comfort.

## Wi-Fi Control Built-in! Never Return to a Cold Home Again



With built-in Wi-Fi Control you can pre-heat or cool a room no matter where you are. On the way home, running late, coming home early, or even when you're in a different country, with Wi-Fi Control you'll always arrive home to total comfort.

Wi-Fi Control is Amazon Alexa and Google Home enabled so you can take your comfort to the next level and enjoy hands-free heat pump control. See pages 6–7 for more details on Wi-Fi Control.



Dimensions (WxDxH): 890 x 233 x 307mm

### MSZ-LN25VG2V/B/R

Heating Capacity: 3.2 kW | Cooling Capacity: 2.5 kW

### MSZ-LN35VG2V/B/R

Heating Capacity: 4.0 kW | Cooling Capacity: 3.5 kW

### MSZ-LN50VG2V/B/R

Heating Capacity: 6.0 kW | Cooling Capacity: 5.0 kW

### MSZ-LN60VG2V/B/R\*

Heating Capacity: 6.8 kW | Cooling Capacity: 6.1 kW

\* The Black Diamond Series LN60 does not feature HyperCore Technology.



**BUILT-IN**  
**Wi-Fi**  
**CONTROL**

\* LN 25/35 indoor sound level on the lowest fan setting.

# RapidHeat KW Series




New Zealand's quietest floor consoles\* feature a contemporary slimline design and dramatically reduced depth. RapidHeat KW Floor Consoles are the perfect solution for unobtrusive heating at floor level. New advanced sensors with Intuitive Control Logic Technology offer unparalleled low temperature heating performance in the shortest amount of time, all while maintaining maximum energy efficiency.



## NZ's Quietest Floor Consoles

Starting at barely a whisper, Mitsubishi Electric RapidHeat KW Floor Consoles are New Zealand's quietest floor console heat pumps starting from just 18dBA\*. This is achieved through the use of a larger fan scroll that not only enables the unit to be quieter, but also increases its efficiency when heating your home.

## RapidHeat Technology

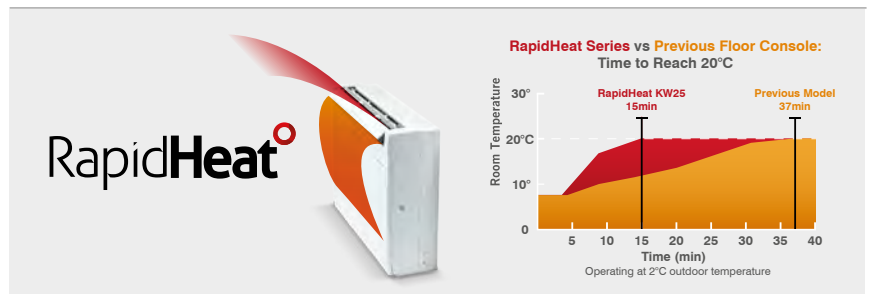

Advanced sensors coupled with Intuitive Control Logic mean optimal running temperatures are reached in the shortest amount of time possible with maximum energy efficiency. Automatically activated at start-up in low temperature conditions when Two-Way Airflow is selected, warm air is blown in a downward direction first before the air is returned back into the indoor unit where it is reheated a second time. As a result, a room can now be heated up to twice as fast compared to our previous model.†

## Sleek, Sophisticated Design



Mitsubishi Electric RapidHeat KW Floor Consoles feature a new contemporary design that can be recessed into your wall to dramatically reduce the depth of the indoor unit from 215mm to 145mm – a decrease of 33%. With the addition of a removable base, it is the perfect solution offering compact, unobtrusive heating for new buildings, renovation projects and fireplace replacements.

## More Environmentally Friendly R32 Refrigerant



With a global warming potential that is 30% lower compared to older refrigerants such as R410A, next-generation R32 refrigerant has a much lower environmental impact. Furthermore, zero ozone depleting R32 is easier to reuse and recycle.


\*MFZ-KW25/35/42 indoor sound level on lowest fan setting in Heating Mode.  
 †Compared to the previous MFZ-KA Series,



# RapidHeat<sup>o</sup>

## Multi Vane Flow for Even Heat Distribution

The Multi Vane Flow function blows warm air in both an upward and downward direction providing fast, even and effective heating whilst also reducing draughts. This is achieved via three uniquely shaped vanes that are designed for better airflow control and also provide the freedom to be customised to your preference.



## Anti-Allergy Enzyme Filter



In addition to a washable Air Purifying Filter, the RapidHeat KW Series features an Anti-Allergy Enzyme Filter which utilises enzyme catalysts to filter allergens and remove harmful bacteria.

## 7-Day Programmable Controller




All RapidHeat KW Series Floor Consoles feature a built-in weekly timer, allowing you to program up to four time and temperature settings for each day of the week. You can now return to comfort without having to manually adjust the temperature. Perfect for anyone with a busy lifestyle, the 7-Day Controller is a great way to regulate your energy usage without compromising on comfort.

## Optional HyperCore Technology<sup>\*\*</sup>



The RapidHeat KW Series Floor Consoles come with optional HyperCore Technology. While ordinary heat pumps produce less heat below 7°C, Mitsubishi Electric HyperCore Technology continues to deliver its full rated heating capacity right down to -15°C, so you stay warm when you need it most. See page 4 for more details on our HyperCore Technology.

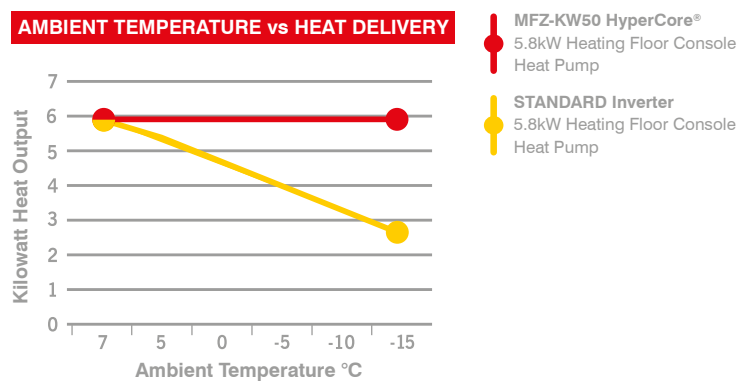

Dimensions (WxDxH): 750 x 215 x 600mm

### MFZ-KW25VG

Heating Capacity: 3.4 kW | Cooling Capacity: 2.5 kW

### MFZ-KW35VG

Heating Capacity: 4.3 kW | Cooling Capacity: 3.5 kW

### MFZ-KW42VG

Heating Capacity: 5.4 kW | Cooling Capacity: 4.2 kW

### MFZ-KW50VG

Heating Capacity: 5.8 kW | Cooling Capacity: 5.0 kW

### MFZ-KW60VG

Heating Capacity: 6.5 kW | Cooling Capacity: 6.1 kW

## HYPERCORE<sup>®</sup>

### MFZ-KW50VGHZ

Heating Capacity: 5.8 kW | Cooling Capacity: 5.0 kW

### MFZ-KW60VGHZ

Heating Capacity: 6.5 kW | Cooling Capacity: 6.1 kW



## HYPERCORE

## Optional Wi-Fi Control! Never Return to a Cold Home Again



With optional Wi-Fi Control you can pre-heat or cool a room no matter where you are. On the way home, running late, coming home early, or even when you're in a different country, with Wi-Fi Control you'll always arrive home to total comfort.

Wi-Fi Control is Amazon Alexa and Google Home enabled so you can take your comfort to the next level and enjoy hands-free heat pump control. See pages 6–7 for more details on Wi-Fi Control.

## OPTIONAL Wi-Fi CONTROL

<sup>\*\*</sup> 5.0kW and 6.1kW models only.

# MLZ Cassette Series




The MLZ One-Way Cassette Series offers a compact and streamlined ceiling-mounted solution for unobtrusive comfort. Featuring a new design combined with advanced airflow options, the MLZ Series is ideal for both home and office applications.



## Slim Body Design

The units are designed with a slim body (only 185mm high), ensuring easy installation even when low ceiling cavities limit installation space. The need for ceiling cavity service space is also eliminated, further reducing the dimensions required for installation.

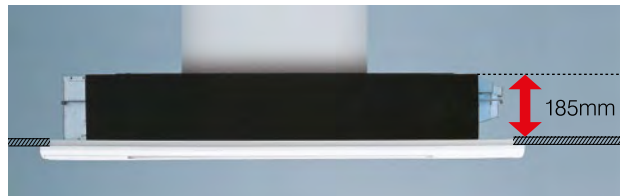

## Set Airflow According to Ceiling Height

Dual-level airflow selection is engineered to accommodate specific ceiling heights. This is a key feature for adjusting airflow effectively when it is either too strong or too weak due to being mismatched with the height of the ceiling.

Capacity Class	25	35	50
Standard	2.4m	2.4m	2.4m
High Ceiling	2.7m	2.7m	2.7m



## Quiet Operation


Starting from just 26dBA\*, the MLZ Series offers unobtrusive, quiet comfort. No other one-way cassette is quieter!

\* MLZ-KP25 indoor sound level on lowest fan setting in Heating Mode.

## Auto Vane Control



Outlet vanes can be moved left and right, and up and down using the remote controller. This improved airflow control feature solves the problem of draughts.

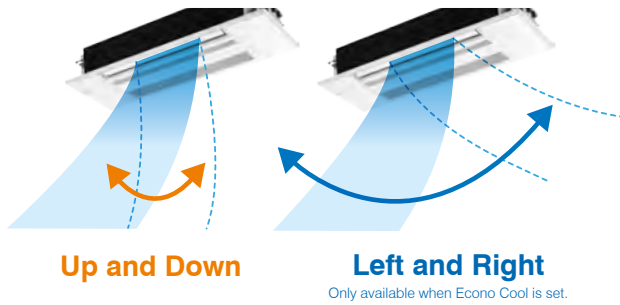

Unit Dimensions (WxDxH): 1102 x 360 x 185mm  
Panel Dimensions (WxDxH): 1200 x 424 x 24mm

### MLZ-KP25VF

Heating Capacity: 3.2 kW | Cooling Capacity: 2.5 kW

### MLZ-KP35VF

Heating Capacity: 4.1 kW | Cooling Capacity: 3.5 kW

### MLZ-KP50VF

Heating Capacity: 6.0 kW | Cooling Capacity: 5.0 kW

## Horizontal Airflow



The new airflow control completely eliminates that uncomfortable draughty-feeling with the introduction of a horizontal airflow that spreads across the ceiling. The ideal airflow for offices and restaurants.

## Next-Generation R32 Technology



MLZ One-Way Cassette Series feature the latest in super-efficient and more environmentally friendly R32 refrigerant. With a global warming potential that is 30% lower compared to older refrigerants such as R410A, next generation R32 refrigerant has a much lower environmental impact. Furthermore, zero ozone depleting R32 is easier to reuse and recycle.

## Optional Wi-Fi Control: Elevate Comfort, Maximise Efficiency



With optional Wi-Fi Control you can pre-heat or pre-cool a room no matter where you are. On the way home, running late, coming home early, or even when you're in a different country, with Wi-Fi Control you'll always arrive home to total comfort.

Wi-Fi Control is Amazon Alexa and Google Home enabled so you can take your comfort to the next level and enjoy hands-free heat pump control. See pages 6–7 for more details on Wi-Fi Control.



OPTIONAL  
**Wi-Fi**  
CONTROL

# SLZ Cassette Series



Compact and ultra quiet, our range of SLZ Ceiling Cassette Heat Pumps are equipped with 4-way airflow and cutting edge control. They offer you the flexibility to keep your wall and floor space free without compromising on your comfort.



## Stylish, Slimline Design


With an inconspicuous look that blends seamlessly into any room, the SLZ Series' pure white colour and compact, linear design is ideal for discreet heating and cooling. A recipient of the Good Design Award, the new SLZ Series fits into narrow ceiling spaces with a height of only 245mm.



**i-see Sensor**


## 3D i-See Sensor

The 3D i-See Sensor works to detect the floor temperature and how many people are present in the room; automatically switching to the optimal operating mode based on this information.

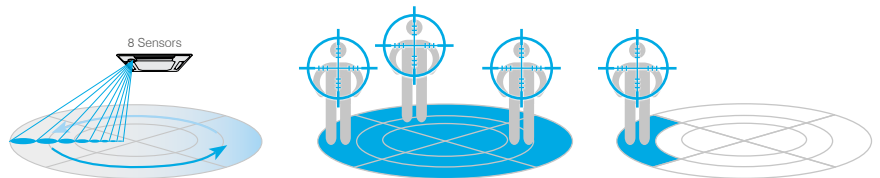

With a total of eight sensors, which rotate a full 360° in three-minute intervals, the 3D i-See Sensor is able to detect people's positions within the room to provide direct or indirect airflow, as preferred.

When the 3D i-See Sensor detects that the room is unoccupied, it switches to Energy-Saving Mode or Auto-Off, as set by user.



## Horizontal Airflow

Using 4-way vane outlets, the SLZ Series eliminates uncomfortable draughts and provides improved airflow control with six different discharge angles. The air discharge channels provide a lateral airflow advantage; ensuring users are not susceptible to airflow and air is discharged evenly across the entire space.

## Low Noise Levels

The patented 3D turbo fan with two-stage blade structure ensures low noise operation, for a quieter comfortable environment. Starting from a hushed 25dBA\*, the SLZ Series offers whisper quiet operation.

\*SLZ-M25/35 indoor sound level on lowest fan setting in Heating Mode.

from  
**25dBA\***

## Fresh Air Intake



A duct opening is provided in the main body making it possible to bring fresh air in directly, where it can then be heated to provide clean, refreshing comfort.

## Long Life Air Cleaning Filter



A built-in filter removes dust and contaminants keeping air purified and deodorised. The washable, long-life filter can be used for up to 2,500 hours with simple maintenance.

## More Environmentally Friendly R32 Refrigerant



With a global warming potential that is 30% lower compared to older refrigerants such as R410A, next-generation R32 refrigerant has a much lower environmental impact. Furthermore, zero ozone depleting R32 is easier to reuse and recycle.

## Easy Installation



The SLZ Series comes equipped with a temporary suspension hook-on grille; improving efficiency during installation. Installation is also possible without removing screws for the corner panel and control box, enabling rapid and safe installation by a single person.

## 7-Day Programmable Controller



The handheld or wall mounted controller features a built-in weekly timer, allowing you to program up to four time and temperature settings for each day of the week. You can now return to comfort without having to manually adjust the temperature. Perfect for anyone with a busy lifestyle, the 7-Day Controller is a great way to regulate your energy usage without compromising on comfort.

## Optional Wi-Fi Control! Never Return to a Cold Home Again



With optional Wi-Fi Control you can pre-heat or cool a room no matter where you are. On the way home, running late, coming home early, or even when you're in a different country, with Wi-Fi Control you'll always arrive home to total comfort.

Wi-Fi Control is Amazon Alexa and Google Home enabled so you can take your comfort to the next level and enjoy hands-free heat pump control. See pages 6–7 for more details on Wi-Fi Control.



Unit Dimensions (WxDxH): 570 x 570 x 245mm

Panel Dimensions (WxDxH): 625 x 625 x 10mm

### SLZ-M25FA

Heating Capacity: 3.0 kW | Cooling Capacity: 2.5 kW

### SLZ-M35FA

Heating Capacity: 4.0 kW | Cooling Capacity: 3.5 kW

### SLZ-M50FA

Heating Capacity: 5.0 kW | Cooling Capacity: 5.0 kW

### SLZ-M60FA

Heating Capacity: 6.0 kW | Cooling Capacity: 5.6 kW



OPTIONAL  
**Wi-Fi**  
CONTROL

# OmniCore Multi Room Systems

While a standard heat pump system consists of an indoor and outdoor unit, an OmniCore Multi Room Heat Pump System allows you to connect multiple indoor units, up to eight, with just one OmniCore outdoor unit. This system not only gives you the freedom to select the indoor model best suited to each and every room in your home, it also enhances exterior aesthetics by reducing the number of outdoor units required.




## Connect One Outdoor to Multiple Indoor Units

An OmniCore Multi Room Heat Pump System not only gives you the freedom to select the indoor model best suited to each and every room in your home, it also enhances exterior aesthetics by reducing the number of outdoor units required.

With an OmniCore Multi Room Heat Pump System you have the freedom to choose the ideal unit for each area of your home, keeping you comfortable without cluttering the exterior.

With Mitsubishi Electric Heat Pump Technology, you also get the benefit of superior efficiency and energy savings.

**OmniCORE**  
The Heart of Multi Room

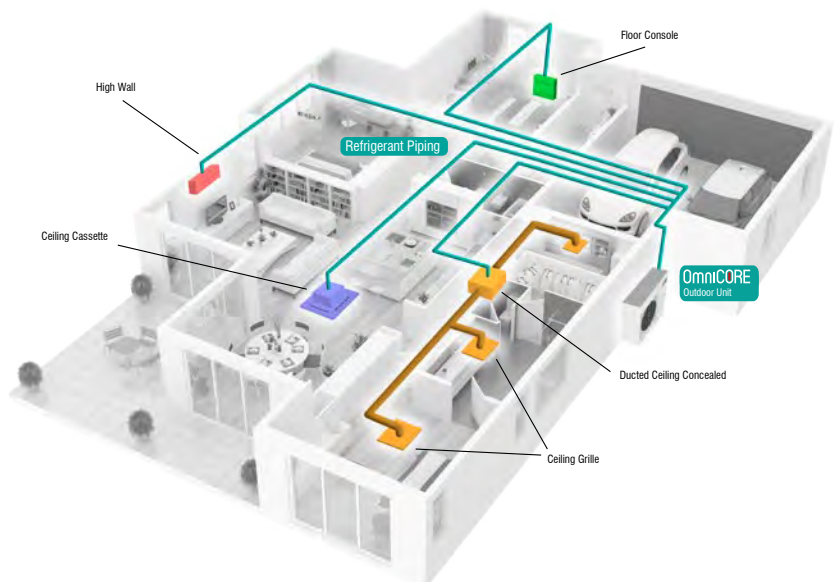

## Style for Each and Every Room

With an OmniCore Multi Room Heat Pump System, you have the flexibility to choose the perfect indoor heat pump for each room. Whether it's a small capacity whisper quiet high wall for the bedroom, a compact floor console for the office or a discreet ducted model for the lounge, there is a style and capacity to fit any room – no matter the size or interior aesthetic.

## Selecting the Right System

Correct sizing of a Mitsubishi Electric OmniCore Multi Room System matches the energy load of the indoor units desired with the appropriate OmniCore outdoor unit. Your Mitsubishi Electric Authorised Installer will be able to guide you through this process while recommending the optimum type of heat pump for each room, ensuring the best solution for your whole home.


## Individual Temperature Control for Each Room

The OmniCore Multi Room System allows individual control of every heat pump in your home; whether you want to increase the temperature in the kids' bedroom before bedtime, or turn off the living room heat pump as you head out for dinner. With individual heat pump control, you can adjust the temperature to suit your comfort levels and ensure a heat pump is only operating when needed; maximising energy savings.

## Future-Proof and Add Units as Your Family Grows

With the OmniCore Multi Room System, there is no need to hurry and choose all the possible indoor units for your home at once. Indoor units do not have to be connected up all at the same time when you first install the system. This means for example a four room system could be installed with only two indoor units connected to begin with; giving you the flexibility to add up to two more rooms in the future – all connected to the one OmniCore outdoor unit.

- ✓ Only one outdoor
- ✓ Choose from high walls, floor consoles, ducted or cassettes
- ✓ Energy efficient
- ✓ From 1 to 8 room solutions
- ✓ Whisper quiet
- ✓ Optional Wi-Fi Control
- ✓ Optional Zone Control (ducted indoors only)



If you would like more information about our whole home options then please ask for a copy of our OmniCore Multi Room Heat Pump Systems brochure.



# Ducted Systems



As the most discreet space heating solution available, Ducted Systems offer a stylish, quiet alternative that is largely hidden from view with only subtle air grilles visible. They are ideal for both larger residences and offices that value the aesthetics of elegant, unobtrusive heating.



## PEAD and PEA Ducted Range

For powerful performance without compromising elegance or style, this range complements a room's environment and offers a vast line-up of performance functions. Hidden from view with only subtle grilles showing, ducted units are installed in the roof cavity and ducting is used to connect multiple duct grilles to provide heating or cooling to each room.

The installation possibilities are endless. Using flexible duct design and a wide range of variations in airflow options, ducted systems provide greater freedom in the placement of indoor units throughout the home. Meanwhile, the addition of a PAC-ZC Zone Controller equipped with Intuitive Airflow Control, expands functionality and interaction to realise even greater energy savings.

## Next-Generation R32 Technology

With a global warming potential that is 30% lower compared to older refrigerants such as R410A, next-generation R32 refrigerant has a much lower environmental impact. Furthermore, zero ozone depleting R32 is easier to reuse and recycle.

## Optional Wi-Fi Control! Never Return to a Cold Home Again

With optional Wi-Fi Control you can pre-heat or cool a room no matter where you are. On the way home, running late, coming home early, or even when you're in a different country, with Wi-Fi Control you'll always arrive home to total comfort.

Wi-Fi Control is Amazon Alexa and Google Home enabled so you can take your comfort to the next level and enjoy hands-free heat pump control. See pages 6–7 for more details on Wi-Fi Control.



OPTIONAL  
**Wi-Fi**  
CONTROL



## PEAD Series

The unobtrusive PEAD Ducted Series is specifically designed for installations where ceiling space is minimal. The system is super energy efficient and whisper quiet. With only its grilles visible, it is the perfect hidden comfort solution for heating or cooling multiple rooms at the same time.

### Compact Indoor Units

The height of the PEAD (5kW~14.0kW) models has been unified to 250mm making installation possible in low ceilings with minimal clearance space. It has variable airflow settings to ensure the best operation to match virtually all room layouts.

### Wide Selection of Fan Speeds and External Static Pressure

All PEAD models incorporate five-stage external static pressure conversions and three fan speed selections, offering the ultimate in comfort diversity. With a wide range of adjustable static pressures (35-125Pa), PEAD Series units are applicable to a wide range of building types and applications.

### Optional Plasma Quad Connect for Cleaner, Healthier Air

Designed to integrate with your existing PEAD Ducted Heat Pump, this high-performance two-stage advanced air filtration module, cleans and minimises dust and other allergens for better indoor air quality, all year round.

## PEA Series

For the ultimate in elegance and style, the PEA Ducted Series is the ideal total home comfort solution year-round. The unobtrusive ceiling installation means your walls are free for you to truly express your interior design aesthetic. With a whole home ducted system you experience energy efficient, whisper quiet operation.

### Flexible Duct Design with High Pressure Static Fan

With a range of external static pressure settings from 50Pa–150Pa, the PEA Series offer high airflow rates for whole home comfort, with complete flexibility in duct design.

## PEA-HAA Splittable Series

Featuring a two-piece construction that allows separation\* of the indoor unit's heat exchanger and fan deck, the PEA-HAA Splittable Ducted System allows for flexible installation into a roof space.

Convenient two-way maintenance access and easier installation means homeowners now have the choice of an unobtrusive central ducted heating and cooling solution when renovating their home.

See page 44 for exact dimensions of the fan deck and heat exchanger parts when the indoor unit is split.

## Optional Zone Controllers



The optional Zone Controller brings intuitive yet simple control to a whole new level, with the ability to control up to eight zones, automatic unloading/ramping and energy saving sensor functions.

See our OmniCore Multi Room Heat Pump Systems brochure for more information about Zone Controllers and whole home solutions.

\*When fully installed the PEA-M HAA should be assembled together in one-piece. Any gaps between the fan deck section and heat exchanger at final install will result in significant pressure loss.



### PEAD-M50JAA

Heating Capacity: 6.0 kW | Cooling Capacity: 5.0 kW

### PEAD-M60JAA

Heating Capacity: 7.0 kW | Cooling Capacity: 6.0 kW

### PEAD-M71JAA

Heating Capacity: 8.0 kW | Cooling Capacity: 7.1 kW

### PEAD-M100JAA

Heating Capacity: 11.2 kW | Cooling Capacity: 10.0 kW

### PEAD-M125JAA

Heating Capacity: 14.0 kW | Cooling Capacity: 12.5 kW

### PEAD-M140JAA

Heating Capacity: 16.0 kW | Cooling Capacity: 14.0 kW

**Optional**  
**Plasma Quad Connect**  
Advanced Air Filtration



### PEA-M100GAA

Heating Capacity: 11.2 kW | Cooling Capacity: 10.0 kW

### PEA-M125GAA

Heating Capacity: 14.0 kW | Cooling Capacity: 12.5 kW

### PEA-M140GAA

Heating Capacity: 16.0 kW | Cooling Capacity: 14.0 kW



### PEA-M100HAA

Heating Capacity: 11.2 kW | Cooling Capacity: 10.0 kW

### PEA-M125HAA

Heating Capacity: 14.0 kW | Cooling Capacity: 12.5 kW

### PEA-M140HAA

Heating Capacity: 16.0 kW | Cooling Capacity: 14.0 kW

### PEA-M160HAA

Heating Capacity: 18.0 kW | Cooling Capacity: 16.0 kW



### PEA-M180LAA

Heating Capacity: 20.0 kW | Cooling Capacity: 18.0 kW

### PEA-M200LAA

Heating Capacity: 22.4 kW | Cooling Capacity: 20.0 kW

### PEA-M250LAA

Heating Capacity: 28.0 kW | Cooling Capacity: 24.5 kW

# Plasma Quad Connect

## Optional Advanced Air Filtration System

We spend up to 80% of our time inside. As such, good indoor air quality is paramount to our well-being. So how can home owners have the peace of mind they can breathe cleaner, healthier air all year round?

With Plasma Quad Connect, occupants can now add advanced filtration to most Mitsubishi Electric High Wall and Ducted Systems.

**Optional**  
**Plasma Quad Connect**  
Advanced Air Filtration



Introducing the Plasma Quad Connect Air Filtration System – a new optional accessory for most Mitsubishi Electric High Wall and Ducted Systems, featuring high performance two stage plasma technology. This advanced filtration system works to clean away viruses including Covid-19\* as well as smells, dust, mould and other common household allergens, making it an ideal addition for asthma and allergy sufferers or those seeking a healthier, safer home.

## How Polluted is the Air Inside Your Home?

You may be surprised how contaminated indoor air actually can be. You might not be able to see it – but it is there! Every time you open your doors or windows, external pollutants such as pollen, dust and other allergens enter the home. But did you know oil and fat particles from cooking all release microscopic particles into the air too?


Dust and pet dander (dead skin flakes), mould build-up and mildew spores triggered by dampness can further increase concentrations of pollutants. There is substantial evidence to support the claim that breathing Particulate Matter (PM) is harmful to human health, particularly smaller fractions such as PM10 and PM2.5.

## Cleaner, Healthier Air with Two Stage Plasma Filter

The Plasma Quad Connect is designed to work like an electrical curtain, using an advanced two-stage process which first makes plasma that breaks down air pollutants and then creates an electrical discharge that neutralises even microscopic particles in the air.

In fact, it can even capture particles as small as PM2.5, which are up to 20 times smaller than the width of a human hair! Unseen to the human eye, these microscopic particles can easily penetrate deep into our lungs and even our bloodstream.

The result? A more healthy and cleaner living environment that can be enjoyed year-round.

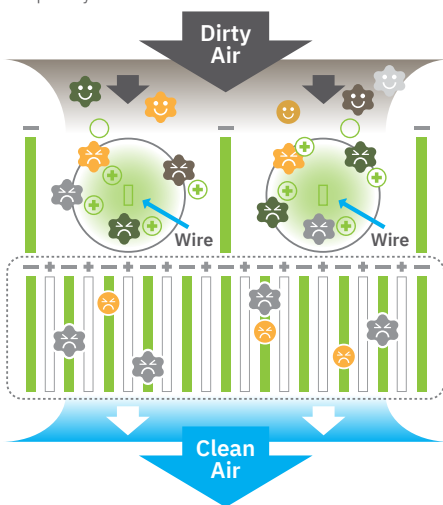

^ Such as Influenza A virus A/Aichi/2/68 (H3N2) - tested in a 25m<sup>2</sup> room by Virus Research Center, Sendai Medical Center, National Hospital Organisation according to JEM 1467.

## Highly Effective Filtration – Protect Against Covid-19

Independent test results confirm that the Plasma Quad Connect Filtration System achieves extremely high reduction results in the removal of allergen, mould, bacteria and virus particles in the room. In addition, Plasma Quad Connect is 98.8% effective at neutralising Covid-19\* particles from the room's air. This provides the ultimate peace of mind and ensures a healthier and cleaner living environment.



### MAC-100FT-E


Dimensions (WxDxH): 500 x 168 x 56mm

Weight: 1.6 kg

Power Consumption: 4 W



#### Micro Particles



PM2.5 particles 99% neutralised in 300 mins.

25m<sup>3</sup> test space.  
Life Science Research Laboratory,  
No. LSRL-21010E-E091


#### Allergens



98% cat allergens and pollen neutralised.

Mid Airflow Setting (1.0m/s).  
ITEA Report No. T1606028


#### Viruses



99% neutralised in 175 mins.

25m<sup>3</sup> test space.  
Test No. vrc.center, SMC No.R2-003

#### Covid-19 (SARS-CoV-2)



98.8% neutralised in 360 mins.

PQC Electrode Collection Plate,  
Test Chamber Lab.

Test No. 20KB070569, Microbial Testing Laboratory Kobe Testing Center Japan Textile Products Quality and Technology Center.


#### Bacteria



99% neutralised in 335 mins.

30m<sup>3</sup> test space.  
CHEARI (Beijing) Certification & Testing Co., Ltd. WK-21-50161

#### Dust & Ticks



99.7% neutralised.

Mid Airflow Setting (1.0m/s).  
ITEA Report No. T1606028

#### Moulds



99% neutralised in 160 mins.

25m<sup>3</sup> test space.  
Life Science Research Laboratory,  
No. LSRL-51021E-E091

## Available on New Installs and as an Optional Retrofit


Designed to be installed directly above high wall units, the Plasma Quad Connect is an optional Advanced Air Filtration System, compatible with the following current Mitsubishi Electric High Wall and Ducted systems.

#### High Wall Systems:

- Standard GS Series
- EcoCore AP Series – AP Mini, AP Classic and AP Plus
- EcoCore Designer EF Series
- Large Capacity AS90

#### Ducted Systems:

- SEZ-M Series\*<sup>2</sup>
- PEAD-M/RP Series\*<sup>2</sup>
- City Multi PEFY-P~VMA Series\*<sup>2</sup>
- City Multi PEFY-P~VMX Series\*<sup>2</sup>

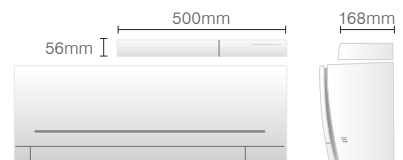

\* PQC Electrode Collection Plate, Test Chamber Lab – Test No. 20KB070569, Microbial Testing Laboratory Kobe Testing Center Japan Textile Products Quality and Technology Center.

\*<sup>2</sup> Requires additional attachments.

# The Lossnay Difference

The Mitsubishi Electric Lossnay System is a patented heat recovery ventilation solution that uses fresh air (not attic air) to ventilate your home. The system works by extracting stale air from inside your house and replacing it with allergen-reduced fresh air from outside.

Furthermore, Lossnay also recovers heat energy from the outgoing stale air to pre-warm (or pre-cool) the fresh air being drawn into your home.



\*1 Compared to the use of a 100% fresh air, conventional ventilation system.

\*2 In comparison to using a dedicated cooling device. The unit will continue to use a small amount of power to bring colder fresh air from outside.

\*3 Lossnay must be in Auto Mode, and the outdoor air is cooler than the desired set temperature inside your home.

\*4 VL-220C2GV on lowest fan speed. Measured at 1.5m.

## Recovers Energy to Pre-warm or Pre-cool Incoming Fresh Air

Lossnay's unique Heat Recovery Technology collects up to 92% of the heat energy in outgoing air to pre-warm or pre-cool the incoming fresh air.



## Energy Efficient, Save on your Power Bill\*1

With Lossnay's Heat Recovery Technology, less additional heating/cooling of incoming air is required to achieve your ideal home temperature – saving you money.



## Moisture and Condensation Control

Effectively reduces moisture in your home by directly removing stale air that causes condensation.



## Automatic Free Cooling\*2 Mode

When specific conditions are met\*3, Lossnay will automatically enter Automatic Free Cooling Mode. As a result, cooler fresh air is introduced and stale air is extracted, bypassing the Lossnay Core. This is ideal for cooling down a dwelling that may have overheated during the day, once the outside temperature has dropped in the evening.



## Now You Can See and Feel the Lossnay Difference!

The Lossnay Wi-Fi Control App lets you see by how many degrees Lossnay is pre-warming or pre-cooling your home and reminds you to clean the unit's filters, maximising cost efficiency and health benefits.



## Fresh Air Without Open Windows

Lossnay ensures a well-ventilated home without opening windows, enhancing safety and minimising outdoor noise for your family.



## Improved Air Quality

By drawing in fresh outdoor air and not attic air, indoor air quality is improved as high levels of CO<sub>2</sub>, odours, pollen and other pollutants are removed – ideal for allergy and asthma sufferers.



## Whisper Quiet Operation

From an ultra quiet 14dB<sup>4</sup>, Lossnay is the ideal solution for residential homes and apartments where quiet comfort is key.



## Easy To Clean

The standard filters can be removed for regular cleaning to keep the unit in optimal working condition.



# Fresh Air Heat Recovery Ventilation for all Types of Applications


Ventilating your home is vital as it maintains air quality and reduces moisture, creating a healthier and more comfortable environment. There is a Lossnay solution to suit most New Zealand homes, from whole home ducted to single room applications.

Lossnay is specifically designed for more airtight homes built to the current New Zealand Building Code; delivering the optimum amount of fresh air without creating draughts and minimising indoor temperature fluctuations.

## Whole Home Ventilation

### In-Ceiling Solutions

These ducted whole home balanced pressure Lossnay Heat Recovery Ventilation Systems are designed for installation in homes that have available roof or attic space to accommodate the heat exchanger and corresponding ducting.

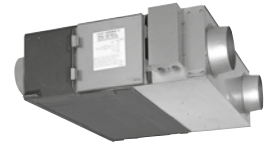

### Vertical Solutions

The slimline, Vertical Lossnay Series features a small, upright footprint that can be placed in the garage or a utility cupboard and is not limited to an in-roof installation.



## Single Room Ventilation

### In-Ceiling Single Room Solutions

This cost effective ventilation system is specifically designed to provide fresh filtered air to a single room with the additional benefit of energy efficient heat recovery at the same time. The ducted design means the system can be installed in the roof or attic space, so it is unobtrusive and hidden away.



### Wall Mounted Single Room Solutions

This easy to install back-to-back wall mounted system is designed to provide cost effective energy recovery ventilation to one specific area in the home. The ductless design means the system is ideal for homes and buildings where there is no roof space to install a heat exchanger.



ADVANCED  
**Wi-Fi**  
CONTROL



## Make Heat Recovery Ventilation Visible – with Advanced Lossnay Wi-Fi Control

Elevating air quality and maximising energy efficiencies has never been easier, because now the power is in your hands.

See by how many degrees<sup>\*5</sup> Lossnay is pre-warming or cooling your home in real time, helping you save on your power bill because less additional heating is required to get a room up to temperature.

And in summer, monitor by how many degrees Lossnay can reduce the average temperature in your home, using Automatic Free Cooling<sup>\*2</sup> Mode.

The app will also proactively remind you when it is time to clean your filters to maximise both cost efficient operation and health benefits.

Lossnay Wi-Fi Control truly is the smart evolution in fresh air ventilation.

<sup>\*2</sup> In comparison to using a dedicated cooling device. The unit will continue to use a small amount of power to bring colder fresh air from outside.

<sup>\*5</sup> The outside 'Fresh Air' and the inside 'Avg Temp' air temperatures are measured by the built-in sensors that are centrally located in the main Lossnay Ventilation unit.

# Controllers

## Handheld Remotes

### 7-Day Programmable Controller (Standard)

Allowing you to program up to four time and temperature settings for each day of the week, you can now return to comfort without having to manually adjust the temperature. Perfect for anyone with a busy lifestyle, the 7-Day Controller is a great way to regulate your energy usage without compromising on comfort. The 7-Day Controller is available on the EcoCore AP, AP Mini, Classic AP, Large Capacity AS90, EcoCore Designer EF, Black Diamond LN and RapidHeat KW Series.

### Deluxe 7-Day Programmable Controller (Optional – SLZ Series)

With the ability to program up to four time and temperature settings for each day of the week, you can return to comfort without having to manually adjust the temperature. With a backlit screen for easy viewing, and advanced feature controls exclusive to the SLZ Series, including the 3D i-See Sensor and individual vane settings, the Deluxe 7-Day Controller offers the ultimate in customised comfort.



## Wall Mounted Controllers

### PAR 7-Day Controller

The PAR Controller allows you to program up to eight stop/start patterns per day for up to seven days at a time. Other features include a variety of operation control functions, operation lock and multi-language display. The PAR Controller also offers the following at the touch of a button; LCD backlit screen, large, easy-to-read display and mode view for both icon and word display.

Standard Inclusion: SEZ, PEAD. Optional upgrade for all other indoors.



## Central Controllers

### AT-50B 5" LCD Touch Screen – Optional Upgrade

Able to control up to 50 units and featuring both weekly and daily timer functions, the AT-50 is a cost-effective solution for large domestic or small commercial systems. It also features a 5" backlit, colour touch-screen LCD display. The AT-50 is also able to be integrated for control of additional equipment such as extractor and fresh air fans, ventilation systems and outdoor security lighting.

As part of a larger system, domestic or commercial, the Power Multi Series can be connected to M-NET control, benefitting directly from the features of AT50B and AE200 without the need for interface. In particular, the AE200 allows web browser and BMS control.

# Optional Wi-Fi Control

Advanced temperature monitoring and management. Now you can control, monitor and schedule which zones your ducted heat pump is controlling in real time from anywhere via your smart phone, tablet or online account.



# Zone Controller

Optional for PEAD/PEA Ducted Systems

With the ability to control up to eight zones\* and equipped with automatic unloading/ramping and three built-in sensor functions (Temperature, Occupancy, Brightness), the PAC-ZC40~80 Zone Controller brings intuitive yet simple control to a whole new level.

\* PAC-ZC80 only. PAC-ZC40 only allows control of four zones. Compatible with either 24V or 240V damper options. Optional: 1x additional PAR-ZC01ME-E controller and 2x thermistors (PAC-SE41TS-E) can be installed.



## Features

### Temperature Sensor

With an inbuilt thermostat (PAR-ZC01ME-E Wall Controller), the Zone Controller allows the actual usable space temperature to be measured, offering a more realistic and timely temperature measurement where it is needed most.

### Occupancy Sensor

The Zone Controller (via the PAR-ZC01ME-E wall controller) constantly monitors the usable area to detect vacancy. Once detected, one of four user defined energy-save control options can be implemented to reduce energy consumption: turn the unit on/off, lower the fan speed, temperature offset, or turn user designated zones on/off.

### Brightness Sensor


Working in conjunction with the Occupancy Sensor, the Brightness Sensor can be set to maximise energy savings when it detects user defined "Light" or "Dark" conditions (lux values).

### Backlit LCD Touch Screen

Featuring a liquid-crystal display (LCD), back lit for operation in dark conditions. For ease of use, the user defined coloured LED indicator (at the bottom of the controller) lights up to indicate the current operation mode i.e. red for Heating, blue for Cooling, green for Night Setback.

### Intuitive Airflow Control

Where traditional ducted systems require manual adjustment of the indoor fan speed, the PAC-ZC40L-E, equipped with the exclusive Mitsubishi Electric Intuitive Airflow Control, intuitively detects which zones you have open/closed and adjusts the fan speed accordingly. When zones are not in use the fan speed is lowered automatically, leading to increased overall energy savings.

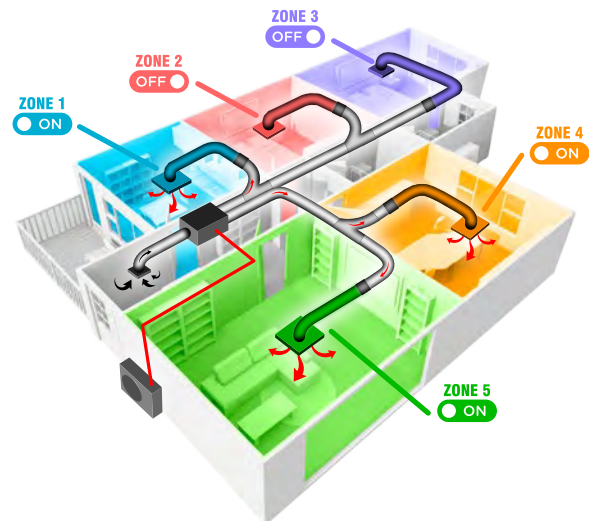

# Specifications

QUICK GLANCE	TYPE		High Wall System											
	SERIES		Standard GS Series											
	MODEL		MSZ-GS25	MSZ-GS35	MSZ-GS50	MSZ-GS60	MSZ-GS71	MSZ-GS80						
	REFRIGERANT		R32											
	INDOOR UNIT		MSZ-GS25VFD	MSZ-GS35VFD	MSZ-GS50VFD	MSZ-GS60VFD	MSZ-GS71VFD	MSZ-GS80VFD						
	OUTDOOR UNIT		MUZ-GS25VFD	MUZ-GS35VFD	MUZ-GS50VFD	MUZ-GS60VFD	MUZ-GS71VFD	MUZ-GS80VFD						
	COOL		2.5kW 4.24 EER 22 dBA*	3.5kW 3.68 EER 22 dBA*	5.0kW 3.60 EER 33 dBA*	6.0kW 3.61 EER 33 dBA*	7.1kW 3.24 EER 33 dBA*	7.8kW 3.25 EER 33 dBA*						
HEAT		3.1kW 3.97 COP 23 dBA*	3.7kW 3.94 COP 23 dBA*	5.5kW 3.85 COP 33 dBA*	6.6kW 3.88 COP 33 dBA*	8.0kW 3.64 COP 33 dBA*	9.0kW 3.53 COP 33 dBA*							
ZERL STAR RATINGS	(NZ) Cold Area		2.5	2.0	3.0	2.0	3.5	2.0	3.5	2.0	3.0	2.0	3.0	2.0
	Avg Area <sup>‡</sup>		2.5	2.5	3.0	2.0	3.0	2.5	3.0	2.5	2.5	2.5	2.5	2.5
	Hot Area <sup>‡</sup>		3.0	3.0	3.5	2.5	3.5	3.0	3.5	3.0	3.0	3.0	3.0	3.0
COOL	Capacity	Rated	[kW]	2.5	3.5	5.0	6.0	7.1	7.8					
		Min-Max	[kW]	1.1-3.0	1.1-3.7	1.4-5.5	1.4-6.8	1.4-7.3	2.0-9.0					
	Total Input	Rated	[kW]	0.59	0.95	1.39	1.66	2.19	2.40					
	EER/AEER			4.24 / 4.12	3.68 / 3.62	3.60 / 3.55	3.61 / 3.58	3.24 / 3.22	3.25 / 3.23					
	Indoor Sound Level	Quiet	[dBA]	-	-	-	-	-	-					
		Low-SHi <sup>‡</sup>	[dBA]	22-30-37-44	22-31-40-51	33-38-44-49	33-38-44-50	33-38-44-50	33-38-44-53					
	Running Current (Rated)	[A]	2.8	4.3	6.2	7.4	9.7	10.5						
Air Volume In (SHI <sup>†</sup> )	[L/s]	163	223	308	322	317	342							
HEAT	Capacity	Rated	[kW]	3.1	3.7	5.5	6.6	8.0	9.0					
		Min-Max	[kW]	1.3-3.8	1.3-4.3	1.4-6.5	2.0-7.5	2.0-8.6	2.2-10.0					
		@-15°C	[kW]	-	-	-	-	-	-					
	Total Input	Rated	[kW]	0.78	0.94	1.43	1.70	2.20	2.55					
	COP / ACOP			3.97 / 3.89	3.94 / 3.87	3.85 / 3.80	3.88 / 3.84	3.64 / 3.61	3.53 / 3.51					
	Indoor Sound Level	Quiet	[dBA]	-	-	-	-	-	-					
		Low-SHi <sup>‡</sup>	[dBA]	23-30-37-44	23-30-37-45	33-38-44-49	33-38-44-49	33-39-45-51	33-39-45-51					
Running Current (Rated)	[A]	3.7	4.3	6.4	7.6	10.0	11.9							
Air Volume In (SHI <sup>†</sup> )	[L/s]	172	178	308	322	317	317							
Controller	Standard		12 Hour Programmable Controller											
	Optional Wired 7-Day Timer		Optional: PAR Controller (Interface Required)											
Wi-Fi			Optional: MAC-568IF-E											
Power Supply	(Powered From Outdoor Unit)		230 V / Single Phase / 50 Hz											
	Maximum Current	[A]	7.3	7.3	13.5	13.5	13.5	17.5						
Indoor	Dimensions (WxDxH)	[mm]	799 x 232 x 290			923 x 250 x 305			1100 x 238 x 325					
	Weight	[kg]	8.5	8.5	12.3	12.3	15.2	15.2						
Outdoor	Dimensions (WxDxH)	[mm]	800 x 285 x 550			800 x 285 x 714			840 x 330 x 880					
	Weight	[kg]	28	28.5	41	41	53	53						
	Sound Level - SPL <sup>§</sup> /Power (Cooling-Heating)	[dBA]	47-48 / 60-61	51-51 / 64-64	53-56 / 66-69	53-57 / 66-69	56-57 / 69-69	56-57 / 69-69						
Piping	Diameter (Liquid/Gas)	[mm]	6.35 / 9.52	6.35 / 9.52	6.35 / 12.70	6.35 / 12.70	6.35 / 12.70	6.35 / 12.70						
	Max. Length/Height <sup>†</sup>	[m]	20 / 12	20 / 12	30 / 15	30 / 15	30 / 15	30 / 15						
	Chargeless Piping Length	[m]	10	10	15	15	15	15						
Operation Range Outdoor	Cooling	[°C]	-10-46	-10-46	-10-46	-10-46	-10-46	-10-46						
	Heating	[°C]	-15-24	-15-24	-15-24	-15-24	-15-24	-15-24						
Indoor Unit Colour			White											

ZERL = Zoned Energy Rating Label  
 EER = Energy Efficiency Ratio  
 COP = Coefficient of Performance  
 AEER = Annual Energy Efficiency Ratio  
 ACOP = Annual Coefficient of Performance

SPL = Sound Pressure Level  
<sup>†</sup> SHi = Super High  
<sup>‡</sup> Low-SHi = Low-Medium-High-Super High  
<sup>§</sup> SPL measured under rated operating frequency  
 \* Indoor Sound Levels rated at lowest fan speed.

† Maximum length is inclusive of height differential i.e. (20/12) means the pipe can be 12m high and 8m across for a total length of 20m.  
<sup>‡</sup> Avg/Hot are Australia only.  
 Rating Conditions (AS / NZS 3823).  
 Cooling: Indoor: 27°C DB, 19°C WB. Outdoor: 35°C DB  
 Heating: Indoor: 20°C DB Outdoor: 7°C DB, 6°C WB.



QUICK GLANCE	TYPE		High Wall System																			
	SERIES		AP Mini		AP Classic Series and AP Plus Series												AS90					
	MODEL		MSZ-AP20	MSZ-AP25	MSZ-AP35	MSZ-AP42	MSZ-AP50	MSZ-AP60	MSZ-AP71	MSZ-AP80	MSZ-AS90											
	REFRIGERANT		R32																			
	INDOOR UNIT		MSZ-AP20VGD	MSZ-AP25VG(K)D	MSZ-AP35VG(K)D	MSZ-AP42VG(K)D	MSZ-AP50VG(K)D	MSZ-AP60VG(K)D	MSZ-AP71VG(K)D	MSZ-AP80VG(K)D	MSZ-AS90VGD											
	OUTDOOR UNIT		MUZ-AP20VG	MUZ-AP25VG	MUZ-AP35VG	MUZ-AP42VG	MUZ-AP50VG	MUZ-AP60VG	MUZ-AP71VG	MUZ-AP80VG	MUZ-AS90VGD											
	COOL		2.0kW 4.35 EER 21 dBA*	2.5kW 5.00 EER 19 dBA*	3.5kW 4.02 EER 19 dBA*	4.2kW 3.53 EER 26 dBA*	5.0kW 3.79 EER 28 dBA*	6.0kW 3.77 EER 29 dBA*	7.1kW 3.53 EER 30 dBA*	7.8kW 3.31 EER 30 dBA*	9.0kW 3.24 EER 30 dBA*											
	HEAT		2.5kW 4.17 COP 21 dBA*	3.2kW 4.78 COP 18 dBA*	3.7kW 4.51 COP 19 dBA*	5.4kW 3.78 COP 26 dBA*	6.0kW 3.70 COP 28 dBA*	6.8kW 4.12 COP 29 dBA*	8.0kW 3.83 COP 30 dBA*	9.0kW 3.53 COP 30 dBA*	10.3kW 3.50 COP 32 dBA*											
	ZERL STAR RATINGS		(NZ) Cold Area		3.5	2.0	6.0	3.0	5.0	3.0	4.0	2.0	4.5	2.0	4.5	2.5	3.5	2.0	3.5	2.0	3.5	2.0
			Avg Area†		3.5	2.5	5.5	3.0	4.5	3.5	4.0	2.5	4.0	2.5	4.0	2.5	3.0	2.5	3.0	2.5	3.0	2.5
		Hot Area†		3.5	3.0	6.0	3.5	5.0	4.0	4.0	3.5	4.5	3.5	4.5	3.0	3.5	3.0	3.5	3.0	3.5	3.0	
COOL	Capacity	Rated	[kW]	2.0	2.5	3.5	4.2	5.0	6.0	7.1	7.8	9.0										
		Min-Max	[kW]	0.6-2.7	1.1-3.6	1.1-4.1	0.9-4.8	1.4-6.2	1.4-7.3	2.0-8.7	2.0-9.2	1.35-10.30										
	Total Input	Rated	[kW]	0.46	0.50	0.87	1.19	1.32	1.59	2.01	2.36	2.78										
	EER/AEER		4.35 / 4.31	5.00 / 4.97	4.02 / 4.01	3.53 / 3.52	3.79 / 3.78	3.77 / 3.77	3.53 / 3.53	3.31 / 3.30	3.24 / 3.23											
	Indoor Sound Level	Quiet	[dBA]	21	19	19	26	28	29	30	30	30										
		Low-SHi <sup>2</sup>	[dBA]	26-30-35-42	24-31-38-44	24-31-38-45	29-35-40-46	33-39-44-49	37-41-45-48	37-41-45-49	37-41-45-53	36-42-48-54										
	Running Current (Rated)	[A]	2.6	2.6	4.1	5.3	5.9	7.1	8.8	10.8	12.0											
Air Volume In (SHi <sup>1</sup> )	[L/s]	115	205	223	223	258	315	310	343	463												
HEAT	Capacity	Rated	[kW]	2.5	3.2	3.7	5.4	6.0	6.8	8.0	9.0	10.3										
		Min-Max	[kW]	0.5-3.5	1.3-5.0	1.3-5.1	1.3-6.0	1.4-8.0	2.0-8.6	2.2-9.9	2.2-11.0	1.60-11.5										
		@-15°C	[kW]	-	-	-	-	-	-	-	-	-										
	Total Input	Rated	[kW]	0.60	0.67	0.82	1.43	1.62	1.65	2.09	2.55	2.94										
	COP / ACOP		4.17 / 4.14	4.78 / 4.75	4.51 / 4.49	3.78 / 3.77	3.70 / 3.70	4.12 / 4.11	3.83 / 3.82	3.53 / 3.53	3.50 / 3.50											
	Indoor Sound Level	Quiet	[dBA]	21	18	19	26	28	29	30	30	32										
		Low-SHi <sup>2</sup>	[dBA]	26-30-35-42	25-31-38-42	25-31-38-45	29-35-40-46	33-38-43-48	37-41-45-48	37-41-45-51	37-41-45-51	38-43-47-53										
Running Current (Rated)	[A]	3.2	3.3	3.8	6.3	7.1	7.3	9.1	11.3	12.6												
Air Volume In (SHi <sup>1</sup> )	[L/s]	122	190	215	233	268	338	320	320	430												
Controller	Standard		7-Day Programmable Controller																			
	Optional Wired 7-Day Timer		Optional: PAR Controller (Interface Required)																			
Wi-Fi			Optional MAC-568IF-E upgrade for AP Mini, AP Classic Series & AS90 / Built-In to AP Plus Series																			
Power Supply	(Powered From Outdoor Unit)		230 V / Single Phase / 50 Hz																			
	Maximum Current	[A]	7.1	7.0	7.1	9.9	14.0	14.0	16.4	16.5	17.6											
Indoor	Dimensions (WxDxH)	[mm]	760 x 178 x 250	798 x 219 x 299						1100 x 257 x 325				1170 x 295 x 365								
	Weight	[kg]	8.2	10.5						16		17		20								
Outdoor	Dimensions (WxDxH)	[mm]	800 x 285 x 550				800 x 285 x 714				840 x 330 x 880											
	Weight	[kg]	31	35			36		41		55			53								
	Sound Level - SPL <sup>3</sup> /Power (Cooling-Heating)	[dBA]	47-48 / 59-61	46-49 / 59-59	50-50 / 64-64	51-52 / 65-65	54-56 / 69-69	55-57 / 69-69	56-55 / 69-69	56-55 / 69-69	56-56 / 69-69											
Piping	Diameter (Liquid/Gas)	[mm]	6.35 / 9.52	6.35 / 9.52	6.35 / 9.52	6.35 / 9.52	6.35 / 12.7	6.35 / 12.7	6.35 / 12.7	6.35 / 12.7	6.35 / 12.7											
	Max. Length/Height†	[m]	20 / 12	20 / 12	20 / 12	20 / 12	20 / 12	30 / 15	30 / 15	30 / 15	30 / 15											
	Chargeless Piping Length	[m]	7	10	10	10	15	15	15	15	15											
Operation Range Outdoor	Cooling	[°C]	-10 / 46	-10 / 46	-10 / 46	-10 / 46	-10 / 46	-10 / 46	-10 / 46	-10 / 46	-10 / 46											
	Heating	[°C]	-15 / 24	-15 / 24	-15 / 24	-15 / 24	-15 / 24	-15 / 24	-15 / 24	-15 / 24	-15 / 24											
Indoor Unit Colour			White																			

ZERL = Zoned Energy Rating Label  
 EER = Energy Efficiency Ratio  
 COP = Coefficient of Performance  
 AEER = Annual Energy Efficiency Ratio  
 ACOP = Annual Coefficient of Performance

SPL = Sound Pressure Level  
<sup>1</sup> SHi = Super High  
<sup>2</sup> Low-SHi = Low-Medium-High-Super High  
<sup>3</sup> SPL measured under rated operating frequency  
 \* Indoor Sound Levels rated at lowest fan speed.

† Maximum length is inclusive of height differential i.e. (20/12) means the pipe can be 12m high and 8m across for a total length of 20m.  
 ‡ Avg/Hot are Australia only.  
 Rating Conditions (AS / NZS 3823).  
 Cooling: Indoor: 27°C DB, 19°C WB. Outdoor: 35°C DB  
 Heating: Indoor: 20°C DB Outdoor: 7°C DB, 6°C WB.

# Specifications

QUICK GLANCE	TYPE		High Wall System																	
	SERIES		Designer EF Series								Black Diamond LN Series									
	MODEL		MSZ-EF25		MSZ-EF35		MSZ-EF42		MSZ-EF50		MSZ-LN25		MSZ-LN35		MSZ-LN50		MSZ-LN60			
	REFRIGERANT		R32																	
	INDOOR UNIT		MSZ-EF25VGK		MSZ-EF35VGK		MSZ-EF42VGK		MSZ-EF50VGK		MSZ-LN25VG2		MSZ-LN35VG2		MSZ-LN50VG2		MSZ-LN60VG2			
	OUTDOOR UNIT		MUZ-EF25VG		MUZ-EF35VG		MUZ-EF42VG		MUZ-EF50VG		MUZ-LN25VGHZ		MUZ-LN35VGHZ		MUZ-LN50VGHZ		MUZ-LN60VG			
	COOL		2.5kW 4.63 EER 19 dBA*		3.5kW 3.85 EER 21 dBA*		4.2kW 3.50 EER 28 dBA*		5.0kW 3.23 EER 30 dBA*		2.5kW 5.10 EER 19 dBA*		3.5kW 4.27 EER 19 dBA*		5.0kW 3.62 EER 27 dBA*		6.1kW 3.53 EER 29 dBA*			
	HEAT		3.2kW 4.57 COP 21 dBA*		4.0kW 4.21 COP 21 dBA*		5.4kW 3.71 COP 28 dBA*		5.8kW 3.72 COP 30 dBA*		3.2kW 5.33 COP 19 dBA*		4.0kW 4.88 COP 19 dBA*		6.0kW 4.00 COP 25 dBA*		6.8kW 3.78 COP 29 dBA*			
	ZERL STAR RATINGS		(NZ) Cold Area		4.0 2.5		3.5 2.0		3.0 2.0		3.0 2.0		5.0 3.0		4.0 3.0		3.5 2.5		3.0 2.0	
			Avg Area†		4.0 2.5		3.5 2.5		3.0 2.5		4.5 3.5		4.0 3.5		3.0 2.5		3.0 2.5			
		Hot Area†		4.5 3.0		3.5 3.0		3.0 3.0		5.0 4.0		4.0 3.5		3.5 3.0		3.0 3.0				
COOL	Capacity		Rated [kW]	2.5		3.5		4.2		5.0		2.5		3.5		5.0		6.1		
			Min-Max [kW]	0.9 - 3.4		1.1 - 4.0		0.9 - 4.6		1.4 - 5.4		0.8 - 3.5		0.8 - 4.0		1.4 - 5.8		1.4 - 6.9		
	Total Input		Rated [kW]	0.54		0.91		1.20		1.55		0.49		0.82		1.38		1.73		
			EER/AEER	4.63 / 4.60		3.85 / 3.83		3.50 / 3.49		3.23 / 3.22		5.10 / 5.07		4.27 / 4.25		3.62 / 3.61		3.53 / 3.52		
	Indoor Sound Level		Quiet [dBA]	19		21		28		30		19		19		27		29		
			Low-SHi² [dBA]	23-29-36-42		24-30-36-42		31-35-39-43		33-36-40-43		23-29-36-42		24-29-36-43		31-35-39-46		37-41-45-49		
	Running Current (Rated)		[A]	3.0		4.2		5.4		6.9		2.5		3.8		6.3		7.8		
Air Volume In (SHi³)		[L/s]	175		175		187		188		207		217		232		262			
HEAT	Capacity		Rated [kW]	3.2		4.0		5.4		5.8		3.2		4.0		6.0		6.8		
			Min-Max [kW]	1.0-4.2		1.3-5.1		1.3-6.3		1.4-7.5		0.8-6.3		0.9-7.0		1.8-9.0		1.8-9.8		
			@-15°C [kW]	-		-		-		-		3.2		4.0		6.0		-		
	Total Input		Rated [kW]	0.70		0.95		1.46		1.56		0.60		0.82		1.50		1.80		
			COP / ACOP	4.57 / 4.55		4.21 / 4.20		3.71 / 3.70		3.72 / 3.71		5.33 / 5.30		4.88 / 4.86		4.00 / 3.99		3.78 / 3.77		
	Indoor Sound Level		Quiet [dBA]	21		21		28		30		19		19		25		29		
			Low-SHi² [dBA]	24-29-37-45		24-30-38-46		30-35-41-48		33-37-43-49		24-29-38-45		24-29-38-45		29-34-39-47		37-41-45-49		
Running Current (Rated)		[A]	3.5		4.4		6.5		7.1		3.0		3.8		6.8		7.9			
Air Volume In (SHi³)		[L/s]	198		212		220		243		232		232		262		263			
Controller	Standard		7-Day Programmable Controller								Premium LN 7-Day Programmable Controller and Wi-Fi Control									
	Optional Wired 7-Day Timer		Optional: PAR Controller (Interface Required)								Optional: PAR Controller (Interface Required)									
Wi-Fi			Built-in								Built-In									
Power Supply	(Powered From Outdoor Unit)		230 V / Single Phase / 50 Hz								230 V / Single Phase / 50 Hz									
	Maximum Current		[A]	7.1		7.1		10.0		14.0		7.1		9.9		13.9		15.2		
Indoor	Dimensions (WxDxH)		885 x 195 x 299								890 x 233 x 307									
	Weight		[kg]	11.5								15.5				16.0				
Outdoor	Dimensions (WxDxH)		800 x 285 x 550				800 x 285 x 714				800 x 285 x 550				840 x 330 x 880					
	Weight		[kg]	31		34		35		40		34				55				
	Sound Level - SPL³/Power (Cooling-Heating)		[dBA]	47-48 / 58-61		49-50 / 62-63		50-51 / 62-64		52-52 / 65-65		46-49 / 60-61		49-50 / 61-62		51-55 / 64-66		55-55 / 65-69		
Piping	Diameter (Liquid/Gas)		6.35 / 9.52		6.35 / 9.52		6.35 / 9.52		6.35 / 9.52		6.35 / 9.52		6.35 / 9.52		6.35 / 9.52		6.35 / 12.7			
	Max. Length/Height†		[m]	20 / 12		20 / 12		20 / 12		30 / 15		20 / 12		20 / 12		30 / 15		30 / 15		
	Chargeless Piping Length		[m]	7		7		7		7		10		10		7		7		
Operation Range Outdoor	Cooling		[°C]	-10 / 46		-10 / 46		-10 / 46		-10 / 46		-10 / +46		-10 / +46		-10 / +46		-10 / +46		
	Heating		[°C]	-15 / 24		-15 / 24		-15 / 24		-15 / 24		-25 / +24		-25 / +24		-25 / +24		-15 / +24		
Indoor Unit Colour		Black Diamond / Matte Silver / Pure White								Black Diamond / Red Diamond / White Diamond										

ZERL = Zoned Energy Rating Label  
 EER = Energy Efficiency Ratio  
 COP = Coefficient of Performance  
 AEER = Annual Energy Efficiency Ratio  
 ACOP = Annual Coefficient of Performance

SPL = Sound Pressure Level  
 ¹ SHi = Super High  
 ² Low-SHi = Low-Medium-High-Super High  
 ³ SPL measured under rated operating frequency  
 \* Indoor Sound Levels rated at lowest fan speed.

† Maximum length is inclusive of height differential i.e. (20/12) means the pipe can be 12m high and 8m across for a total length of 20m.  
 ‡ Avg/Hot are Australia only.  
 Rating Conditions (AS / NZS 3823).  
 Cooling: Indoor: 27°C DB, 19°C WB. Outdoor: 35°C DB  
 Heating: Indoor: 20°C DB Outdoor: 7°C DB, 6°C WB.

QUICK GLANCE	TYPE		Floor Console System													
	SERIES		RapidHeat KW Series										RapidHeat KW Series HyperCore			
	MODEL		MFZ-KW25		MFZ-KW35		MFZ-KW42		MFZ-KW50		MFZ-KW60		MFZ-KW50HZ		MFZ-KW60HZ	
	REFRIGERANT		R32													
	INDOOR UNIT		MFZ-KW25VG		MFZ-KW35G		MFZ-KW42VG		MFZ-KW50VG		MFZ-KW60VG		MFZ-KW50VG		MFZ-KW60VG	
	OUTDOOR UNIT		MUFZ-KW25VG		MUFZ-KW35VG		MUFZ-KW42VG		MUFZ-KW50VG		MUFZ-KW60VG		MUFZ-KW50VGHZ		MUFZ-KW60VGHZ	
	COOL		2.5kW 4.38 EER 20 dBA*		3.5kW 4.02 EER 20 dBA*		4.2kW 3.78 EER 20 dBA*		5.0kW 3.78 EER 27 dBA*		6.1kW 3.52 EER 27 dBA*		5.0kW 3.78 EER 27 dBA*		6.1kW 3.52 EER 27 dBA*	
	HEAT		3.4kW 4.35 COP 18 dBA*		4.3kW 3.77 COP 18 dBA*		5.4kW 3.77 COP 18 dBA*		5.8kW 3.79 COP 29 dBA*		6.5kW 3.45 COP 29 dBA*		5.8kW 3.79 COP 29 dBA*		6.5kW 3.45 COP 29 dBA*	
ZERL STAR RATINGS	(NZ) Cold Area		3.5	2.5	3.5	2.0	3.0	2.0	2.5	2.0	2.5	2.0	2.5	2.0	2.5	2.0
	Avg Area†		3.5	2.5	3.0	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
	Hot Area†		4.0	3.0	3.5	3.0	3.0	3.0	3.0	3.0	2.5	3.0	3.0	3.0	2.5	3.0
COOL	Capacity	Rated	[kW]	2.5	3.5	4.2	5.0	6.1	5.0	6.1						
		Min-Max	[kW]	0.7 - 3.4	0.7 - 3.8	0.7 - 5.0	1.0 - 5.7	1.0 - 6.5	1.0 - 5.7	1.0 - 6.5						
	Total Input	Rated	[kW]	0.57	0.87	1.11	1.32	1.73	1.32	1.73						
	EER/AEER			4.38 / 4.32	4.02 / 3.98	3.78 / 3.75	3.78 / 3.76	3.52 / 3.50	3.78 / 3.76	3.52 / 3.50						
	Indoor Sound Level	Quiet	[dBA]	20	20	20	27	27	27	27						
		Low-SHl <sup>2</sup>	[dBA]	26-32-38-44	26-32-38-44	28-36-43-51	31-35-39-44	35-39-46-53	31-35-39-44	35-39-46-53						
	Running Current (Rated)	[A]	3.0	4.2	5.1	5.8	7.7	5.8	7.7							
Air Volume In (SHl <sup>1</sup> )	[L/s]	172	172	228	177	250	177	250								
HEAT	Capacity	Rated	[kW]	3.4	4.3	5.4	5.8	6.5	5.8	6.5						
		Min-Max	[kW]	0.23 - 4.6	0.23 - 6.0	0.23 - 6.7	1.2 - 8.2	1.2 - 8.8	1.2 - 8.4	1.2 - 9.0						
		@-15°C	[kW]	-	-	-	-	-	5.8	6.5						
	Total Input	Rated	[kW]	0.78	1.14	1.43	1.53	1.88	1.53	1.88						
	COP / ACOP			4.35 / 4.31	3.77 / 3.74	3.77 / 3.75	3.79 / 3.77	3.45 / 3.44	3.79 / 3.77	3.45 / 3.44						
	Indoor Sound Level	Quiet	[dBA]	18	18	18	29	29	29	29						
		Low-SHl <sup>2</sup>	[dBA]	25-31-38-44	25-31-38-44	27-36-44-51	35-40-45-50	35-41-47-51	35-40-45-50	35-41-47-51						
	Running Current (Rated)	[A]	3.8	5.3	6.4	6.8	8.3	6.8	8.3							
Air Volume In (SHl <sup>1</sup> )	[L/s]	173	173	235	233	243	233	243								
Controller	Standard		7-Day Programmable Controller													
	Optional Wired 7-Day Timer		Optional: PAR Controller (Interface Required)													
Wi-Fi			Optional MAC-568IF-E													
Power Supply	(Powered From Outdoor Unit)		230V / Single Phase / 50 Hz													
	Maximum Current	[A]	9.9	9.9	10.1	15.3	15.4	15.3	15.4							
Indoor	Dimensions (WxDxH)	[mm]	750 x 215 x 600													
	Weight	[kg]	15													
Outdoor	Dimensions (WxDxH)	[mm]	800 x 285 x 550						840 x 330 x 880							
	Weight	[kg]	35						54							
	Sound Level - SPL <sup>3</sup> /Power (Cooling-Heating)	[dBA]	48-46 / 61-59	48-47 / 61-60	48-47 / 62-61	53-56 / 66-69	53-56 / 66-69	53-56 / 66-69	53-56 / 66-69							
Piping	Diameter (Liquid/Gas)	[mm]	6.35 / 9.52	6.35 / 9.52	6.35 / 9.52	6.35 / 12.7	6.35 / 12.7	6.35 / 12.7	6.35 / 12.7							
	Max. Length/Height†	[m]	20 / 12	20 / 12	20 / 12	30 / 15	30 / 15	30 / 15	30 / 15							
	Chargeless Piping Length	[m]	7	7	7	7	7	7	7							
Operation Range Outdoor	Cooling	[°C]	-10 / +46	-10 / +46	-10 / +46	-10 / +46	-10 / +46	-10 / +46	-10 / +46							
	Heating	[°C]	-15 / +24	-15 / +24	-15 / +24	-15 / +24	-15 / +24	-25 / +24	-25 / +24							
Indoor Unit Colour			White													

ZERL = Zoned Energy Rating Label  
 EER = Energy Efficiency Ratio  
 COP = Coefficient of Performance  
 AEER = Annual Energy Efficiency Ratio  
 ACOP = Annual Coefficient of Performance

SPL = Sound Pressure Level  
<sup>1</sup> SHl = Super High  
<sup>2</sup> Low-SHl = Low-Medium-High-Super High  
<sup>3</sup> SPL measured under rated operating frequency  
 \* Indoor Sound Levels rated at lowest fan speed.

† Maximum length is inclusive of height differential i.e. (20/12) means the pipe can be 12m high and 8m across for a total length of 20m.  
 ‡ Avg/Hot are Australia only.  
 Rating Conditions (AS / NZS 3823).  
 Cooling: Indoor: 27°C DB, 19°C WB. Outdoor: 35°C DB  
 Heating: Indoor: 20°C DB Outdoor: 7°C DB, 6°C WB.

# Specifications

MLZ Series (One-Way Ceiling Cassette)							
Refrigerant		R32					
Indoor Unit		MLZ-KP25VF		MLZ-KP35VF		MLZ-KP50VF	
Function		COOLING	HEATING	COOLING	HEATING	COOLING	HEATING
Capacity (min.-max.)	(kW)	2.5 (1.5-3.2)	3.2 (1.3-4.2)	3.5 (1.5-4.1)	4.1 (1.3-4.7)	5.0 (2.3-5.5)	6.0 (1.7-6.8)
Total Input	(kW)	0.59	0.79	0.90	1.13	1.37	1.83
Rated EER/COP *1		4.23	4.05	3.88	3.62	3.64	3.27
Rated AEER/ACOP		4.07	3.93	3.80	3.56	3.59	3.24
Power Supply		Single-Phase, 50Hz, 230V					
Airflow (Lo-Hi)	m <sup>3</sup> /min	6-7-8-8.5	6-7-8-9	6-7.5-8.5-9.5	6-7.5-8.5-10	6-8-9.5-11.5	6-8.5-10-12
	L/S	100-120-133-147	100-117-137-153	100-122-140-157	100-128-147-165	100-138-163-190	100-147-172-197
Sound Pressure Level *2	(dB)	27-31-34-38	26-29-34-37	27-32-36-40	26-32-36-40	29-36-41-47	26-37-42-48
External Static Pressure Pa		-					
Dimensions	Height	(mm)	Unit: 185, Panel: 24				
	Width	(mm)	Unit: 1102, Panel: 1200				
	Depth	(mm)	Unit: 360, Panel: 424				
Weight	(kg)	Unit: 15.5, Panel: 3.5					
Outdoor Unit		SUZ-M25VAD		SUZ-M35VAD		SUZ-M50VAD	
Dimensions	Height	(mm)	550	550	714		
	Width	(mm)	800	800	800		
	Depth	(mm)	285	285	285		
Weight	(kg)	30	35	41			
Outdoor temp range	Cooling	[ °C]	-10 / +52	-10 / +52	-15 / +52		
	Heating	[ °C]	-10 / +24	-10 / +24	-15 / +24		

SLZ Series (4-Way Cassette)									
Refrigerant		R32							
Indoor Unit		SLZ-M25FA		SLZ-M35FA		SLZ-M50FA		SLZ-M60FA	
Function		COOLING	HEATING	COOLING	HEATING	COOLING	HEATING	COOLING	HEATING
Capacity (min.-max.)	(kW)	2.5 (1.5-3.5)	3.0 (1.3-4.1)	3.5 (1.5-4.0)	4.0 (1.3-5.0)	5.0 (2.3-5.5)	5.0 (1.7-5.5)	5.6 (2.3-6.7)	6.0 (2.5-7.6)
Total Input	(kW)	0.62	0.78	0.93	1.05	1.49	1.58	1.64	1.87
Rated EER/COP *1		4.03	3.85	3.76	3.80	3.35	3.16	3.41	3.20
Rated AEER/ACOP		3.88	3.73	3.68	3.73	3.31	3.12	3.35	3.16
Power Supply		Single-Phase, 50Hz, 230V							
Airflow (Lo-Hi)	m <sup>3</sup> /min	6.5-7.5-8.5		6.5-9-11.5		7-9-11.5		7.5-11.5-13	
	L/S	108-125-142		108-150-192		117-150-192		125-192-217	
Sound Pressure Level *2	(dB)	25-28-31		25-33-39		27-34-39		32-40-43	
External Static Pressure Pa		-							
Dimensions	Height	(mm)	Unit: 245 – Panel: 10						
	Width	(mm)	Unit: 570 – Panel: 625						
	Depth	(mm)	Unit: 570 – Panel: 625						
Weight	(kg)	Unit: 15 – Panel: 3							
Outdoor Unit		SUZ-M25VAD		SUZ-M35VAD		SUZ-M50VAD		SUZ-M60VAD	
Dimensions	Height	(mm)	550	550	714	880			
	Width	(mm)	800	800	800	840			
	Depth	(mm)	285	285	285	330			
Weight	(kg)	30	35	41	54				
Outdoor temp range	Cooling	[ °C]	-10 / +52	-10 / +52	-15 / +52	-15 / +52			
	Heating	[ °C]	-10 / +24	-10 / +24	-15 / +24	-15 / +24			

\*1 Rated EER/COP for PEA-RP170WJA are measured at ESP 75Pa    \*2 Sound pressure level are measured in anechoic chamber at ESP 150Pa

**PEAD Series (Ducted)**

Refrigerant			R32													
Indoor Unit			PEAD-M50JAA		PEAD-M60JAA		PEAD-M71JAA		PEAD-M71JAA		PEAD-M100JAA		PEAD-M125JAA		PEAD-M140JAA	
Function			COOLING	HEATING	COOLING	HEATING	COOLING	HEATING	COOLING	HEATING	COOLING	HEATING	COOLING	HEATING	COOLING	HEATING
Capacity (min.-max.)	(kW)		5.0 (2.3-6.2)	6.0 (1.7-7.4)	6.0 (2.3-6.5)	7.0 (2.8-8.0)	7.1 (2.8-8.1)	8.0 (2.6-10.2)	7.1 (3.3-8.1)	8.0 (3.5-10.2)	10.0 (4.9-11.4)	11.2 (4.5-14.0)	12.5 (5.5-14.0)	14.0 (5.0-16.0)	14.0 (6.2-15.3)	16.0 (5.7-18.0)
Total Input	(kW)		1.33	1.44	1.72	1.85	1.98	2.00	1.85	1.93	2.67	2.80	3.66	3.52	4.37	4.18
Rated EER/COP *1			3.75	4.16	3.48	3.78	3.58	4.00	3.83	4.14	3.74	4.00	3.41	3.97	3.20	3.82
Rated AEER/ACOP			3.70	4.09	3.43	3.72	3.53	3.93	3.69	3.93	3.61	3.86	3.32	3.86	3.13	3.73
Power Supply			Single-Phase, 50Hz, 230V													
Airflow (Lo-Hi)	m <sup>3</sup> /min		12-14.5-17		14.5-18-21		17.5-21-25		17.5-21-25		24-29-34		29.5-35.5-42		32-39-46	
	L/S		200-242-283		242-300-350		292-350-417		292-350-417		400-483-567		492-592-700		533-650-767	
Sound Pressure Level *2	(dB)		30-35-39		30-32-36		30-33-38		30-33-38		33-38-42		36-40-44		40-44-49	
External Static Pressure Pa			35/50/70/100/125													
Dimensions	Height	(mm)	250		250		250		250		250		250		250	
	Width	(mm)	900		1,100		1,100		1,100		1,400		1,400		1,600	
	Depth	(mm)	732		732		732		732		732		732		732	
Weight	(kg)		26		29		30		30		39		40		44	
Outdoor Unit			SUZ-M50VAD		SUZ-M60VAD		SUZ-M71VAD		PUZ-ZM71VHA		PUZ-ZM100VKA		PUZ-ZM125VKA		PUZ-ZM140VKA	
Dimensions	Height	(mm)	714		880		880		943		1338		1338		1338	
	Width	(mm)	800		840		840		950		1050		1050		1050	
	Depth	(mm)	285		330		330		330		330		330		330	
Weight	(kg)	41		54		55		70		114		114		114		
Outdoor temp range	Cooling	[ °C]	-15 / +52						-5(-15*) / +52							
	Heating	[ °C]	-15 / +24						-20 / +21							

**PEA Series (Ducted)**

Refrigerant			R32					
Indoor Unit			PEA-M100GAA		PEA-M125GAA		PEA-M140GAA	
Function			COOLING	HEATING	COOLING	HEATING	COOLING	HEATING
Capacity (min.-max.)	(kW)		10.0 (4.9-11.4)	11.2 (4.5-14.0)	12.5 (5.5-14.0)	14.0 (5.0-16.0)	14.0 (6.2-15.3)	16.0 (5.7-18.0)
Total Input	(kW)		2.39	2.51	3.52	3.27	4.10	3.90
Rated EER/COP *1			4.18	4.46	3.55	4.28	3.41	4.10
Rated AEER/ACOP			4.01	4.28	3.45	4.15	3.33	3.99
Power Supply			230V, Single-phase, 50Hz					
Airflow (Lo-Hi)	m <sup>3</sup> /min		34-42			48-60		
	L/S		567-700			800-1000		
Sound Pressure Level *2	(dB)		33-38-42		39-42		42-45	
External Static Pressure Pa			50 / 100 / 150					
Dimensions	Height	(mm)	400					
	Width	(mm)	1,400					
	Depth	(mm)	634					
Weight	(kg)	63						
Outdoor Unit			PUZ-ZM100VKA		PUZ-ZM125VKA		PUZ-ZM140VKA	
Dimensions	Height	(mm)	1,338					
	Width	(mm)	1,050					
	Depth	(mm)	330 + 40					
Weight	(kg)	114						
Outdoor temp range	Cooling	[ °C]	-5(-15*) ~ 52					
	Heating	[ °C]	-20 ~ 21					

\*1 Rated EER/COP for PEA-RP170WJA are measured at ESP 75Pa

\*2 Sound pressure level are measured in anechoic chamber at ESP 150Pa

\*3 With optional air protection guide

# Specifications





PEA-HAA/LAA Splitable Series (Ducted)															
Refrigerant		R32													
Indoor Unit		PEA-M100HAA		PEA-M125HAA		PEA-M140HAA		PEA-M160HAA		PEA-M180LAA		PEA-M200LAA		PEA-M250LAA	
Function		COOLING	HEATING	COOLING	HEATING	COOLING	HEATING	COOLING	HEATING	COOLING	HEATING	COOLING	HEATING	COOLING	HEATING
Capacity (min.-max.)	(kW)	10.0 (4.9-11.4)	11.2 (4.5-14.0)	12.5 (5.5-14.0)	14.0 (5.0-16.0)	14.0 (6.2-15.3)	16.0 (5.7-18.0)	16.0 (4.7-17.0)	18.0 (5.4-20.0)	18.0 (4.9-20.0)	20.0 (5.4-22.4)	20.0 (4.9-22.4)	22.4 (5.7-25.0)	24.5 (6.3-25.0)	28.0 (7.9-29.0)
Total Input	(kW)	2.65	2.71	3.50	3.40	4.19	3.97	4.95	4.58	5.52	5.10	6.40	5.90	8.00	7.50
Rated EER/COP *1		3.77	4.13	3.57	4.11	3.34	4.03	3.23	3.93	3.26	3.92	3.12	3.79	3.06	3.73
Rated AEER/ACOP		3.63	3.98	3.47	3.99	3.26	3.93	3.16	3.84	3.20	3.84	3.07	3.72	3.02	3.67
Power Supply		230V, Single-phase, 50Hz										400V, Three-phase, 50Hz			
Airflow (Lo-Hi)	m³/min	30-34-38-42				42-48-54-60				36-50-61-72				42-58-72-84	
	L/S	500-567-633-700				700-800-900-1000				600-833-1017-1200				700-967-1200-1400	
Sound Pressure Level *2	(dB)	29-32-36-38				35-38-42-45				30-37.5-42-46				32.5-40-45.5-48.5	
External Static Pressure Pa		50 / 100 / 150										75 / 100 / 150 / 200 / 250			
Dimensions	Height	Fan Deck: 380 / Heat Exchanger: 380*4										Fan Deck: 470 / Heat Exchanger: 470*4			
	Width	Fan Deck: 1301.5 / Heat Exchanger: 1405*4										Fan Deck: 1370 / Heat Exchanger: 1370*4			
	Depth	Fan Deck: 451 / Heat Exchanger: 449 / Combined: 900*4										Fan Deck: 463 / Heat Exchanger: 657 / Combined: 1120*4			
Weight	(kg)	63				66				88					

Outdoor Unit			PUZ-ZM100VKA-A	PUZ-ZM125VKA-A	PUZ-ZM140VKA-A	PUZ-ZM160VKA	PUZ-ZM180VKA	PUZ-ZM200YKA	PUZ-ZM250YKA	
Dimensions	Height	(mm)	1338							
	Width	(mm)	1050							
	Depth	(mm)	330 + 40							
Weight	(kg)	114			115		136	139		
Outdoor temp range	Cooling	[ °C]	-5(-15*2) ~ 52							
	Heating	[ °C]	-20 ~ 21							

\*1 Rated EER/COP for PEA-RP170WJA are measured at ESP 75Pa    \*2 Sound pressure level are measured in anechoic chamber at ESP 150Pa    \*3 With optional air protection guide  
 \*4 When fully installed the PEA-M HAA/LAA should be assembled together in one-piece. Any gaps between the fan deck section and heat exchanger at final install will result in significant pressure loss.

# Recommended Heat Pumps

				
Standard GS Series High Wall System	EcoCore AP Mini High Wall System	EcoCore AP Classic/Plus High Wall System	Large Capacity AS90 High Wall System	Designer EF Series High Wall System
See pages 8-9	See pages 10-11	See pages 12-13	See pages 14-15	See pages 16-17
				
Black Diamond LN Series High Wall System	RapidHeat KW Series Floor Console System	MLZ / SLZ Series Ceiling Cassette System	OmniCore Systems Whole Home Solution	Ducted Systems Whole Home Solution
See pages 18-21	See pages 22-23	See pages 24-27	See pages 28-29	See pages 30-31

### COLOUR DISCLAIMER

While every effort has been made to display the units as they appear in person any heat pump units shown in this brochure may not be colour accurate. Please ensure you view an actual unit at your nearest Mitsubishi Electric retailer for colour matching.

# Heat Pump Selection Guide



## Each Home is as Individual as its Owner

Ensuring your heat pump is the right size for your home, is as important as choosing the right style. Mitsubishi Electric offers a wide variety of heat pump options to choose from.

Aside from design, the key to selecting the right heat pump to create a comfortable environment is to choose the correct unit size. Choosing an oversized unit could cost you more

in energy usage, while an undersized heat pump may not provide the heating or cooling the room requires.

This guide can be used to give you an approximate idea of heating unit size. A heat pump should not be purchased without first obtaining an in-home consultation by a qualified Mitsubishi Electric Authorised Installer.

### Room Dimensions in a New or Well-Insulated House

Room Size Calculation						Heat Pump Models					
Room Size	Ceiling Height	Room Volume	Room Size Factor	kW Heating	High Wall System					Floor Console System	
					Standard GS Series	AP Classic / Plus Series	Large Capacity AS90	Designer EF Series	Black Diamond LN Series	RapidHeat KW Series	RapidHeat KW Series HyperCore
4m x 3m	x 2.4m	= 28.8m <sup>3</sup>	x 55 watts per m <sup>3</sup>	= 1.6 kW	GS25VFD†	AP20VGD		EF25VGK†	LN25VGHZ†	KW25VG†	
4m x 4m	x 2.4m	= 38.4m <sup>3</sup>	x 55 watts per m <sup>3</sup>	= 2.1 kW	GS25VFD†	AP20VGD		EF25VGK†	LN25VGHZ†	KW25VG†	
4m x 5m	x 2.4m	= 48.0m <sup>3</sup>	x 55 watts per m <sup>3</sup>	= 2.6 kW	GS25VFD	AP20VGD		EF25VGK†	LN25VGHZ†	KW25VG†	
5m x 5m	x 2.4m	= 60.0m <sup>3</sup>	x 55 watts per m <sup>3</sup>	= 3.3 kW	GS35VFD	AP25VG(K)D		EF25VGK	LN25VGHZ	KW25VG	
6m x 5m	x 2.4m	= 72.0m <sup>3</sup>	x 55 watts per m <sup>3</sup>	= 4.0 kW	GS35VFD	AP35VG(K)D		EF35VGK	LN35VGHZ	KW35VG	KW50VGHZ†
6m x 6m	x 2.4m	= 86.4m <sup>3</sup>	x 55 watts per m <sup>3</sup>	= 4.7 kW	GS50VFD	AP42VG(K)D		EF42VGK	LN50VGHZ†	KW42VG	KW50VGHZ†
6m x 7m	x 2.4m	= 100.8m <sup>3</sup>	x 55 watts per m <sup>3</sup>	= 5.5 kW	GS50VFD	AP50VG(K)D		EF50VGK	LN50VGHZ	KW50VG	KW50VGHZ
7m x 7m	x 2.4m	= 117.6m <sup>3</sup>	x 55 watts per m <sup>3</sup>	= 6.5 kW	GS60VFD	AP60VG(K)D			LN60VG	KW60VG	KW60VGHZ
7m x 8m	x 2.4m	= 134.4m <sup>3</sup>	x 55 watts per m <sup>3</sup>	= 7.4 kW	GS71VFD	AP71VG(K)D					
8m x 8m	x 2.4m	= 153.6m <sup>3</sup>	x 55 watts per m <sup>3</sup>	= 8.4 kW	GS80VFD	AP80VG(K)D					
8m x 9m	x 2.4m	= 172.8m <sup>3</sup>	x 55 watts per m <sup>3</sup>	= 9.5 kW			AS90VGD				

At outdoor ambient 7°C. † Higher rated unit for application, but can be used. \*KW25 piping run cannot exceed 15m into a room of 28.8m<sup>3</sup> volume.

### Room Dimensions in a Cold, Damp House or with Lots of Glass

Room Size Calculation						Heat Pump Models					
Room Size	Ceiling Height	Room Volume	Room Size Factor	kW Heating	High Wall System					Floor Console System	
					Standard GS Series	AP Classic / Plus Series	Large Capacity AS90	Designer EF Series	Black Diamond LN Series	RapidHeat KW Series	RapidHeat KW Series HyperCore
4m x 3m	x 2.4m	= 28.8m <sup>3</sup>	x 65 watts per m <sup>3</sup>	= 1.9 kW	GS25VFD†	AP20VGD		EF25VGK†	LN25VGHZ†	KW25VG†	
4m x 4m	x 2.4m	= 38.4m <sup>3</sup>	x 65 watts per m <sup>3</sup>	= 2.5 kW	GS25VFD†	AP20VGD		EF25VGK†	LN25VGHZ†	KW25VG†	
4m x 5m	x 2.4m	= 48.0m <sup>3</sup>	x 65 watts per m <sup>3</sup>	= 3.1 kW	GS35VFD	AP25VG(K)D		EF25VGK	LN25VGHZ	KW25VG	
5m x 5m	x 2.4m	= 60.0m <sup>3</sup>	x 65 watts per m <sup>3</sup>	= 3.9 kW	GS35VFD	AP35VG(K)D		EF35VGK	LN35VGHZ	KW35VG	KW50VGHZ†
6m x 5m	x 2.4m	= 72.0m <sup>3</sup>	x 65 watts per m <sup>3</sup>	= 4.7 kW	GS50VFD	AP42VG(K)D		EF42VGK	LN50VGHZ†	KW42VG	KW50VGHZ†
6m x 6m	x 2.4m	= 86.4m <sup>3</sup>	x 65 watts per m <sup>3</sup>	= 5.6 kW	GS60VFD	AP50VG(K)D		EF50VGK	LN50VGHZ	KW50VG	KW50VGHZ
6m x 7m	x 2.4m	= 100.8m <sup>3</sup>	x 65 watts per m <sup>3</sup>	= 6.5 kW	GS60VFD	AP60VG(K)D			LN60VG	KW60VG	KW60VGHZ
7m x 7m	x 2.4m	= 117.6m <sup>3</sup>	x 65 watts per m <sup>3</sup>	= 7.6 kW	GS71VFD	AP71VG(K)D					
7m x 8m	x 2.4m	= 134.4m <sup>3</sup>	x 65 watts per m <sup>3</sup>	= 8.7 kW	GS80VFD	AP80VG(K)D					
8m x 8m	x 2.4m	= 153.6m <sup>3</sup>	x 65 watts per m <sup>3</sup>	= 10.0 kW			AS90VGD				

At outdoor ambient 7°C. † Higher rated unit for application, but can be used. \*KW25 piping run cannot exceed 15m into a room of 28.8m<sup>3</sup> volume.

Choose the right one! Visit our online Heat Pump Selector at [www.mitsubishi-electric.co.nz/heatpump/selector](http://www.mitsubishi-electric.co.nz/heatpump/selector)





## Black Diamond Technologies and Mitsubishi Electric – an Exclusive Partnership Since 1981

The Mitsubishi Electric Product Range has been exclusively distributed by 100% locally Owned and Operated Black Diamond Technologies Limited for over 40 years in New Zealand.

The combination of an internationally trusted brand with the comfort of a locally owned and operated company means that you will always get the best products, the best local service and the best local support.

Based in Wellington with a further 4 support offices throughout New Zealand, Black Diamond Technologies Limited is here to help.



## Our Vision – Creating New Zealand’s Sustainable Future

Black Diamond Technologies Limited in partnership with Mitsubishi Electric, strives to develop and introduce new technologies for New Zealanders that will make our lives more comfortable while also creating a greener tomorrow.

## Our Nationwide Trained Specialist Installation Network

Mitsubishi Electric Heat Pumps are installed through an extensive network of trained specialist dealers. This ensures you are supported with a superior level of product and installation quality.

## Our Comprehensive 5 Year Warranty

Peace of mind is assured with your choice of Mitsubishi Electric Heat Pumps – supported by a comprehensive 5 year parts and labour warranty.



For more information please visit our website  
or call our Customer Service Team.  
[www.mitsubishi-electric.co.nz](http://www.mitsubishi-electric.co.nz) | 0800 784 382

PRINTED APR 2024

 PLEASE LOOK AFTER THE ENVIRONMENT AND RECYCLE